

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number  
**WO 2004/090936 A2**

- (51) International Patent Classification<sup>7</sup>: **H01L**
- (21) International Application Number: **PCT/FI2004/000224**
- (22) International Filing Date: **13 April 2004 (13.04.2004)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
**60/461,820** **11 April 2003 (11.04.2003)** **US**
- (71) Applicants (for all designated States except US):  
**SILECS OY** [FI/FI]; Tietotie 3, FI-02150 Espoo (FI).  
**PAULASAARI, Jyri** [FI/FI]; Reelinkikatu 14 B 10,  
FI-20810 Turku (FI). **PIETIKÄINEN, Jarkko** [FI/FI];  
Mannerheimintie 35 B 34, FI-00250 Helsinki (FI). **TÖR-**  
**MÄNEN, Teemu** [FI/FI]; Eestintaival 3 A 1, FI-02280  
Espoo (FI). **HACKER, Nigel** [GB/FI]; Suotorpantie 15  
J 31, FI-02130 Espoo (FI). **VISWANATHAN, Nun-**  
**gavaram** [IN/US]; 6427 Trinidad Drive, San Jose, CA  
95120 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **RANTALA, Juha**  
[FI/FI]; Tietotie 3, FI-02150 Espoo (FI).
- (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.
- (84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).
- Published:  
— without international search report and to be republished  
upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: **LOW-K DIELECTRIC MATERIAL**

(57) Abstract: The present invention relates to thin films suitable as dielectrics in integrated circuits and for other similar applications and to methods for the production thereof. In particular, the invention concerns thin films comprising at least partially cross-linked siloxane structures obtainable by hydrolysis of one or more silicon compounds of the general formula  $R_1-R_2-Si-(X_1)_3$ , wherein  $X_1$  is a leaving group,  $R_2$  is a cycloalkyl having from 3 to 16 carbon atoms, an aryl having from 5 to 18 carbon atoms or a polycyclic alkyl group having from 7 to 16 carbon atoms, and  $R_1$  is a substituent of  $R_2$  selected from alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, alkynyl groups having from 2 to 5 carbon atoms, and aromatic groups having 5 or 6 carbon atoms, each of said groups being optionally substituted, and Cl and F.

WO 2004/090936 A2

**LOW-K DIELECTRIC MATERIAL****Background of the Invention****5    Field of the Invention**

The present invention relates to thin films suitable as dielectrics in IC's and for other similar applications. In particular, the invention concerns thin films comprising compositions obtainable by hydrolysis of one or more silicon compounds, which yield an  
10    at least partially cross-linked siloxane structure. The invention also concerns a method for producing such films by preparing siloxane compositions by hydrolysis of suitable reactants, by applying the hydrolyzed compositions on a substrate in the form of a thin layer and by curing the layer to form a film.

**15    Description of Related Art**

Built on a semiconducting substrate, integrated circuits comprise of millions of transistors and other devices, which communicate electrically with one another and outside packaging material through multiple levels of vertical and horizontal wiring embedded in a dielectric  
20    material. Within the multilayer metallization structure, "vias" comprise the vertical wiring, whereas "interconnects" comprise the horizontal wiring. Fabricating the metallization can involve the successive depositing and patterning of multiple layers of dielectric and metal to achieve electrical connection among transistors and to outside packaging material. The patterning for a given layer is often performed by a multi-step process consisting of layer  
25    deposition, photoresist spin, photoresist exposure, photoresist develop, layer etch, and photoresist removal on a substrate. Alternatively, the metal may sometimes be patterned by first etching patterns into a dielectric, filling the pattern with metal, then subsequently chemical mechanical polishing the metal so that the metal remains embedded only in the openings of the dielectric. As an interconnect material, aluminum has been utilized for  
30    many years due to its high conductivity (and low cost). Aluminum alloys have also been developed over the years to improve the melting point, diffusion, electromigration and other qualities as compared to pure aluminum. Spanning successive layers of aluminum, tungsten has traditionally served as the conductive via material. Silicon dioxide (dielectric

constant of around 4.0) has been the dielectric of choice, used in conjunction with aluminum-based and tungsten-based interconnects and via for many years.

The drive to faster microprocessors and more powerful electronic devices in recent years has resulted in very high circuit densities and faster operating speeds, which in turn have required higher conductivity metals and lower-k dielectrics (preferably below 3.0, more preferably below 2.5 dielectric constant). In the past few years, VLSI (and ULSI) processes have been moving to copper damascene processes where copper (or copper alloys) is used for the higher conductance in the conductor lines and spin-on or CVD low-k dielectrics are used for the insulating material surrounding the conductor lines. To circumvent problems with etching, copper along with a barrier metal is blanket deposited over recessed dielectric structures consisting of interconnect and via openings and subsequently polished in a processing method known as "dual damascene." The bottom of the via opening is usually the top of an interconnect from the previous metal layer or in some instances, the contacting layer to the substrate.

15

Figure 1 gives an example of a typical process for patterning a dielectric film. First, a dielectric layer film 12 is deposited on a wafer substrate 10 typically by spin-on or chemical vapor deposition processes. Next, a removable, photosensitive "photoresist" film 14 is spun onto the wafer substrate 10. Afterward, the photoresist 12 is selectively exposed through a mask, which serves as a template for the layer's circuit pattern and is subsequently developed (developer applied to remove either exposed or unexposed areas depending upon the type of resist). The photoresist is typically baked after spin, exposure, and develop. Next, the layer film is etched in a reactive plasma, wet bath, or vapor ambient in regions not covered by the photoresist to define the circuit pattern. Lastly, the photoresist 14 is stripped. The process of layer deposition, photoresist delineation, etching, and stripping is repeated many times during the fabrication process.

20

25

Because photoresist may unacceptably erode during the etch process or may not be able to be adequately delineated within device specifications, a hard mask is sometimes inserted between the layer film and the photoresist (the materials of the invention could also be used for making such a hard mask). Figure 2 illustrates this typical method, which is similar to the dielectric patterning process described previously in relation to Figure 1. The layer film could be metal, semiconductor, or dielectric material depending on the application. As can be seen in Figure 2, a substrate 10 is provided on which is deposited a

30

layer film 12. On film 12 is deposited a hard mask 13. On hard mask 13 is deposited a photoresist material 14. The photoresist is exposed and developed so as to selectively expose the underlying hard mask 13. Then, as can be further seen in Figure 2, the hard mask 13 is etched via the exposed areas in photoresist 12. Thereafter, the photoresist is removed and the dielectric film 12 is etched by using the hard mask 13 as the pattern mask.

The "dual damascene" process used in integrated circuit application combines dielectric etches and sometimes hard masks to form trenches and vias to contain metal interconnects. Figure 3 demonstrates one implementation of the technique. From the bottom up in Figure 3a, the stack is made up of a substrate 20, a dielectric film 22, a hard mask 23, a second dielectric film 24, and a patterned photoresist layer 26. After etching and photoresist strip, a dual-width trench feature is formed as shown in Figure 3b. The openings are then filled with metal and subsequently polished, leaving metal only within the openings.

The procedures shown in Figures 1-3 are often repeated many times during integrated circuit application, which adds to the cost of the circuit and degrades yield. Reducing the number of steps, such as implementing a photopatternable dielectric material, which obviates the need for photoresist and etching steps, has huge benefits to the circuit manufacturer.

In addition to the dielectric IC material being photopatternable, it is also desirable that the material be easy to deposit or form, preferably at a high deposition rate and at a relatively low temperature. Once deposited or formed, it is desirable that the material be easily patterned, and preferably patterned with small feature sizes if needed. Once patterned, the material should preferably have low surface and/or sidewall roughness. It might also be desirable that such materials be hydrophobic to limit uptake of moisture (or other fluids), and be stable with a relatively high glass transition temperature (not degrade or otherwise physically and/or chemically change upon further processing or when in use).

In one embodiment of the present invention, hybrid organic-inorganic materials are used for IC applications. In this embodiment, the hybrid materials of the invention can provide the benefits of low dielectric constant, direct patternability, by exposure to light or particle beam, as well as other characteristics such as stability, glass transition temperature, ease of handling and deposition, etc. In this embodiment, the hybrid materials of the can have an

inorganic backbone, including but not limited to one that is made of a metal or metalloid oxide three dimensional network, and the like, with organic substituents and cross linking groups, that can be partially or fully fluorinated.

5 Summarizing: aside from possessing a low dielectric constant, the ideal dielectric should afford the following properties:

- 1) A high modulus and hardness in order to bind the maze of metal interconnects and vias together as well as abet chemical mechanical polishing processing steps.
  - 10 2) Low thermal expansion, typically less than or equal to that of Al interconnects.
  - 3) Excellent thermal stability, generally in excess of 400°C.
  - 4) No cracking, excellent fill and planarization properties
  - 5) Excellent adhesion to dielectric, semiconductor, and metal materials.
  - 6) Sufficient thermal conductivity to dissipate joule heating from interconnects and vias.
  - 15 7) Material density that precludes absorption of solvents, moisture, or reactive gasses.
  - 8) Allows well-defined vertical etch profiles at very small dimensions.
  - 9) Low current leakage, high breakdown voltages, and low loss-tangents.
  - 10) Stable interfaces between the dielectric and contacting materials.
- 20 By necessity, low-*k* materials are usually engineered on the basis of compromises. Silicate-based low-*k* materials can demonstrate exceptional thermal stability and usable modulus but can be plagued by brittleness and cracking. In contrast, organic materials often show improved material toughness, but at the expense of increased softness, lower thermal stability, and higher thermal expansion coefficients. Porous materials sacrifice
- 25 mechanical properties and possess a strong propensity for absorbing chemicals used in semiconductor fabrication leading to reliability failures. Fluorinated materials can induce corrosion of metal interconnects, rendering a chip inoperative. Universally, low-*k* materials sacrifice mechanical robustness and thermal conductivity with respect to their pure silicon dioxide analogues, making integration into the fabrication flow very challenging.

30

Further, known materials comprising exclusively inorganic bonds making up the siloxane matrix are brittle and have poor elasticity at high temperatures.

**Summary of the Invention**

It is an object of the present invention to improve and eliminate the problems of the known technical solutions and to provide novel low dielectric constant thin films, which have  
5 excellent mechanical and thermal properties.

It is a second object of the invention to provide methods of producing poly(organo siloxane) compositions which are suitable for the preparation of thin films having low dielectric constant. Materials providing dielectric constant values of  $<2.7$  ,  $<2.5$  and  $<2.3$   
10 are also claimed.

It is a third object of the invention to provide a method of patterning dielectric films in semiconductor devices.

15 It is a fourth object of the invention to have precursor monomers, which allow the control electronic polarization of the material and furthermore tunability of dielectric constant of the thin film.

It is a fifth objective of the invention having siloxane polymer composition, which enhance  
20 removal of residual silanol groups from the thin film.

It is still a sixth object of the invention to provide novel molecules for forming of low dielectric constant material formed by a CVD (Chemical Vapor Deposition) method.

25 These and other objects, together with the advantages thereof over the known dielectric thin films and methods for the preparation thereof, which shall become apparent from specification which follows, are accomplished by the invention as hereinafter described and claimed.


30 The present invention is based on the concept of providing a poly(organo siloxane) material, which exhibits both inorganic and organic bonds within the cured and at least partially cross-linked siloxane composition to give a product which has excellent strength properties and good heat-resistance. The inorganic cross-links are based on the conventional silicon-to-oxygen bonds of a siloxane material. However, in addition to these

basically inorganic and partially inflexible bonds, the novel materials may also have organic inter- and intra-chain links formed by the carbon-to-carbon bonds. These bonds are derived from the reactions of unsaturated groups, such as alkenyl or alkynyl groups, with other unsaturated groups.

5

More specifically, according to the present invention thin films comprising at least partially cross-linked siloxane structures are obtainable by hydrolysis of one or more silicon compounds of the general formula

10



wherein

$X_1$  is a leaving group,

15  $R_2$  is a cycloalkyl having from 3 to 16 carbon atoms, an aryl having from 5 to 18 carbon atoms or a polycyclic alkyl group having from 7 to 16 carbon atoms, and

$R_1$  is a substituent of  $R_2$  selected from alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, alkynyl groups having from 2 to 5 carbon atoms, and aromatic groups having 5 or 6 carbon atoms, each of said groups being optionally substituted, and halogens, such as Cl and F.

20

The poly(organo siloxane) compounds provided by the invention typically comprise a repeating Si-O backbone, carbon chain cross-linking groups and  $-R_1-R_2$  bound to from 5% to 50% of the silicon atoms in the Si-O backbone. The Si-O-backbone can further comprise 25  $R_3$  groups bound to the silicon atoms in the Si-O backbone, wherein  $R_3$  is an alkyl chain having from 1 to 4 carbon atoms, an alkenyl chain or an aryl group.

The thin films are excellent dielectric materials which can be used in integrated circuits 30 having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound of the above kind.

A method of making an integrated circuit comprises providing alternating areas of electrically insulating and electrically conducting materials within a layer on a semiconductor substrate, wherein the electrically insulating material comprises a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and  $-R_1-R_2$  bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein  $R_2$  is a cyclic group, such as a cycloalkyl having from 3 to 16 carbon atoms, an aryl having from 5 to 18 carbon atoms or a polycyclic alkyl group having from 7 to 16 carbon atoms, in particular an aromatic group having 6 carbon atoms, and  $R_1$  is a substituent, in particular at position 4 of  $R_2$ , said substituent preferably being selected from an alkyl chain having from 1 to 4 carbons, an alkenyl group having from 2 to 6 carbons or OH.

These kinds of integrated circuits can, naturally, be employed in computers.

Finally, the present invention provides a simplified method of making a chemical compound of the formula  $R_1-R_2-Si-(X_2)_3$ , wherein  $X_2$  is a halogen,  $R_2$  is an aromatic group having 5 to 18 carbon atoms, a cycloalkyl having from 3 to 16 carbon atoms, or a polycyclic alkyl group having from 7 to 16 carbon atoms, and  $R_1$  is a substituent, in particular at position 4 of  $R_2$ ,  $R_1$  being selected from the group consisting of alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, and OH groups. The method comprises:

- reacting a compound of the formula  $R_1-R_2-Br$ , wherein  $R_1$  and  $R_2$  have the same meaning as above, with Mg and with a compound of the formula  $Si-(OR_3)_4$ , wherein  $R_3$  is an alkoxy group having from 1 to 3 carbon atoms, to form a compound of the formula  $R_1-R_2-Si-(OR_3)_3$ , wherein  $R_1$ ,  $R_2$  and  $R_3$  have the same meaning as above;
- reacting the thus obtained compound of the formula  $R_1-R_2-Si-(OR_3)_3$  with a halogenating agent capable of replacing, preferably each,  $R_3$  with a halogen substantially without affecting the rest of the compound of formula  $R_1-R_2-Si-(OR_3)_3$  to produce a compound of the formula  $R_1-R_2-SiX_2$ , wherein  $R_1$ ,  $R_2$  and  $X_2$  have the same meaning as above, and
- recovering the thus obtained compound.

As an example of mildly halogenating (in particular "chlorinating") agents, the combination of  $\text{SO}_2\text{Cl}_2$  with pyridyl hydrochloride ( $\text{C}_5\text{H}_5\text{N}\cdot\text{HCl}$ ) can be mentioned.

The key differentiation of the current material compared to others is that low dielectric constant can be achieved without pore generation into the material. Instead, materials are designed based on materials with electronic and dipole polarizations sufficient to achieve low dielectric constant thin film materials, while simultaneously maintaining all mechanical and thermal requirements set by integrated circuits manufacturing processes and in general related industry. The design of the precursor molecules is based on screening made by molecular modeling methods. For example, the present invention involves the use of 6-, 8-, and 10-membered aromatic and non-aromatic ring structures to obtain the desired properties. Use of mono- and polycyclic ring structures (including bridged structures) are also disclosed. Saturated and unsaturated molecules are also covered.

Next, the invention will be discussed in more detail.

### **Brief Description of the Drawings**

Figure 1 is a cross-sectional view of a conventional process flow for patterning of dielectric film using conventional processes;

Figure 2 is a cross-sectional view of a conventional process flow for etching of a layer film through a hard mask. In some processes, the photoresist strip may occur after the film etch;

Figure 3 is an illustration of a damascene structure before (a) and after (b) final etch and photoresist strip;

Figure 4 is an illustration of a cross-sectional process flow of the present invention for patterning FHOSM films. Note the reduction in steps compared to the standard dielectric process depicted in Figure 1;

Figure 5 is a process flow of the present invention for implementing a photopatternable hard mask process using FHOSM. Note the reduction in steps compared to the convention process shown in Figure 2; and

Figure 6 is a "dual damascene" process flow of the present invention using FHOSM.

### **Detailed Description of the Invention**

The various definitions used below have the following general meanings – the more specific, typical for the preferred embodiments, are given below in connection with the formulas:

‘Alkenyl’ as used herein includes straight-chained and branched alkenyl groups, such as vinyl and allyl groups. The term ‘alkynyl’ as used herein includes straight-chained and branched alkynyl groups, suitably acetylene. ‘Aryl’ means a mono-, bi-, or more cyclic aromatic carbocyclic group, substituted or non-substituted; examples of aryl are phenyl and naphthyl. More specifically, the alkyl, alkenyl or alkynyl may be linear or branched. Alkyl contains preferably 1 to 18, more preferably 1 to 14 and particularly preferred 1 to 12 carbon atoms. The alkyl is preferably branched at the alpha or beta position with one and more, preferably two, C1 to C6 alkyl groups, especially preferred per-fluorinated alkyl, alkenyl or alkynyl groups. Some examples are non-fluorinated, partially fluorinated and per-fluorinated i-propyl, t-butyl, but-2-yl, 2-methylbut-2-yl, and 1,2-dimethylbut-2-yl. Alkenyl contains preferably 2 to 18, more preferably 2 to 14 and particularly preferred 2 to 12 carbon atoms. The ethylenic, i.e. two carbon atoms bonded with double bond, group is preferably located at the position 2 or higher, related to the Si or M atom in the molecule. Branched alkenyl is preferably branched at the alpha or beta position with one and more, preferably two, C1 to C6 alkyl, alkenyl or alkynyl groups, particularly preferred per-fluorinated alkyl, alkenyl or alkynyl groups.

Alkynyl contains preferably 3 to 18, more preferably 3 to 14 and particularly preferred 3 to 12 carbon atoms. The ethylinic group, i.e. two carbon atoms bonded with triple bond, group is preferably located at the position 2 or higher, related to the Si or M atom in the molecule. Branched alkynyl is preferably branched at the alpha or beta position with one and more, preferably two, C1 to C6 alkyl, alkenyl or alkynyl groups, particularly preferred per-fluorinated alkyl, alkenyl or alkynyl groups.

In the context of the disclosure the organic group substituent halogen may also be F, Cl, Br or I atom and is preferably F or Cl. Generally, term ‘halogen’ herein means a fluorine, chlorine, bromine or iodine atom.

By "polycyclic alkyl moiety" we mean, for example, an adamantyl group or a similar cage compound, which is attached to silicon by (at least one) covalent bond. Thus, for example, if each silicon atom in the deposition polymer matrix contains one relative large organic group, in case of adamantyl, the atomic ratio of carbon to oxygen is increased. Thus, a conventional siloxane polymer contains significantly more permanent dipoles than a siloxane polymer made of adamantyl containing precursors. This difference in the content of permanent dipoles affects orientational polarizability so that the orientational dielectric constant can be as low as 0.3 to 0.2 for the siloxane materials made of adamantyl substituted precursors whereas an orientational dielectric constant for conventional siloxane low-k material is typically 0.7 or higher. The adamantyl, which optionally can be substituted, as shown in the examples below, provides excellent properties for the hybrid materials.

Turning now to the drawings, we note that in one embodiment of the invention, the photosensitivity of FHOSM is utilized to reduce the number of processing steps. Instead of patterning the film with photoresist and etch processes, the film dielectric itself is photopatternable like photoresist. Compared to the standard process depicted in Figure 1, the photopatternable FHOSM process eliminates several processing steps potentially reducing costs and improving yield. As can be seen in Figure 4, in the present invention, a substrate 30 is provided. The substrate 30 can be any suitable substrate, such as a silicon substrate, or a substrate having multiple film layers already deposited thereon. On the substrate is deposited the hybrid material 31 of the present invention. The hybrid material is selectively exposed to electromagnetic energy (*e.g.*, UV light) or particle beam (*e.g.*, electron beam), so as to selectively crosslink exposed areas. Non-exposed areas are removed with a developer, as can be seen in Figure 4. Similar to photoresist, the material is baked after spin, development, and when applicable, exposure to optimize performance. As can be seen from the above, the additional steps of adding photoresist, developing the photoresist, etching through exposed areas of the photoresist, and final photoresist removal, are not needed in the present invention as compared to the prior art method illustrated in Figure 1.

Similar to the photopatternable dielectric concept described in the previous embodiment, a photopatternable hybrid material of the present invention may be used as a hard mask material when etching semiconductor, dielectric, or metal underlayers as shown in Figure

5. The number of processing steps required to fabricate the feature is reduced with respect to conventional processing techniques shown in Figures 1 and 2. As can be seen in Figure 5, a substrate 30 is provided on which is deposited a material to be etched 32 (*e.g.*, metal, dielectric or semiconductor layer). On layer 32 is deposited a hard mask 33 which is formed of the hybrid material of the present invention. The hard mask is selectively exposed to electromagnetic radiation or particle beam 34 followed by removal of non-exposed areas of the mask layer. Finally, the underlying layer 32 is etched via the pattern in the mask layer 33 (with an etch chemistry that is tailored to the material 32 and that will not remove to an appreciable degree mask 33). Etching can be accomplished through ion, vapor, or liquid methods.

Owing to their “negative” behavior under exposure, the photopatternable dielectric materials of the present invention can also be applied to reduce the number of processing steps required to build a dielectric “dual damascene” structure. Figure 6 illustrates one embodiment of this. First, the hybrid dielectric material is spun on or otherwise deposited as layer 42 on a substrate 40. Then, layer 42 is selectively exposed and developed to define a via 42a. Next, a “trench” layer 44 (also of the hybrid dielectric material of the invention) is deposited *e.g.*, by spin on, exposed, and developed so as to form a trench 44a and reopen via 42a. No hard mask step or etch steps are required. Because of the negative developing characteristics of the material of the invention, the trench exposure needs no compensation to develop out the unexposed via area 44a filled by the material from trench layer 44.

In the above dual damascene example, either “via” layer 42 or “trench” layer 44, or both can be made of the hybrid, preferably photopatternable, material of the invention. Also, it is possible that though both layers 42 and 44 are hybrid materials of the invention, the hybrid material for layer 42 is different than the material for hybrid layer 44 (different inorganic backbone and/or organic groups discussed further below). Also, though a dual damascene example is illustrated in Figure 6, a “single” damascene or other IC process could be performed – though preferably one that benefits from a photopatternable dielectric. Also, the dielectric materials of the present invention can be used in printed circuit board applications, similar to those discussed above for integrated circuit applications.

According to a first embodiment, the present invention comprises a chemical compound of the formula  $R1-R2-Si-(X1)_3$ , wherein  $X1$  is a halogen, acyloxy, alkoxy or OH group,  $R2$  is an aromatic group having 6 carbon atoms and  $R1$  is a substituent at position 4 of  $R2$  selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having  
5 from 2 to 5 carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F.

According to a second embodiment, the present invention comprises a chemical compound of the formula  $R1-R2-Si-(X1)_3$ , wherein  $X1$  is a halogen, acyloxy, alkoxy or OH group,  $R2$  is an organic polycyclic or bridged ring structure with Si bound to carbon position 1,  
10 and  $R1$  is a substituent at position 3 or higher of  $R2$  selected from an alkyl group having from 1 or more carbons atoms, an alkenyl, an alkynyl, an acrylate, an aryl, an alcohol, OH, H, D, Cl or F.

According to a third embodiment, the present invention comprises a chemical compound  
15 of the formula  $R1-R2-Si-(X1)_3$ , wherein  $X1$  is a halogen, acyloxy, alkoxy or OH group,  $R2$  is an aromatic group having 8 carbon atoms and  $R1$  is a substituent at position 5 of  $R2$  selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F.

According to a fourth embodiment, the present invention comprises a chemical compound  
20 of the formula  $R1-R2-Si-(X1)_3$ , wherein  $X1$  is a halogen, acyloxy, alkoxy or OH group,  $R2$  is an aromatic group having 10 carbon atoms and  $R1$  is a substituent at position 6 of  $R2$  selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F.

According to a fifth embodiment, a poly(organo siloxane) compound comprises a repeating  
25 Si-O backbone, carbon chain crosslinking groups and  $-R1-R2$  bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein  $R2$  is an aromatic group having 6 carbon atoms and  $R1$  is a substituent at position 4 of  $R2$ .

According to a sixth embodiment, a poly(organo siloxane) compound comprises a  
30 repeating Si-O backbone,  $-R1-R2$  bound to from 25% to 50% of the silicon atoms in the Si-O backbone, wherein  $R2$  is an aromatic group having 6 carbon atoms and  $R1$  is a substituent at position 4 of  $R2$  (again this could be drawn out for clarity), and  $R3$  bound to

from 5% to 50% of the silicon atoms, wherein R3 is an alkenyl group having from 2 to 5 carbon atoms, acrylic group or epoxy group.

5 According to a seventh embodiment, a poly(organo siloxane) compound comprises a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is polycyclic or bridged ring structure and R1 is a substituent at position 4 of R2 selected from an alkyl chain having from 1 to 4 carbons, H, D, F or OH.

10 According to an eighth embodiment, a poly(organo siloxane) compound comprises a repeating Si-O backbone, -R1-R2 bound to from 25% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is a polycyclic or bridged ring structure and R1 is a substituent at position 4 of R2 selected from H, D, F, OH, an alkyl group having from 1 to 4 carbon atoms, and an alkenyl group having from 2 to 5 carbon atoms, and further  
15 comprising R3 bound to from 5% to 50% of the silicon atoms, wherein R3 is an alkenyl group having from 2 to 5 carbon atoms, acrylic group, aryl group or epoxy group.

According to a ninth embodiment, a poly(organo siloxane) compound comprises a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5%  
20 to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 8 carbon atoms and R1 is a substituent at position 5 of R2.

According to a tenth embodiment, a poly(organo siloxane) compound comprises a repeating Si-O backbone, -R1-R2 bound to from 25% to 50% of the silicon atoms in the  
25 Si-O backbone, wherein R2 is an aromatic group having 8 carbon atoms and R1 is a substituent at position 5 of R2 (again this could be drawn out for clarity), and R3 bound to from 5% to 50% of the silicon atoms, wherein R3 is an alkenyl group having from 2 to 5 carbon atoms, acrylic group or epoxy group.

30 According to an eleventh embodiment, a poly(organo siloxane) compound comprises a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2.

According to a twelfth embodiment, a poly(organo siloxane) compound comprises a repeating Si-O backbone, -R1-R2 bound to from 25% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2 (again this could be drawn out for clarity), and R3 bound to  
5 from 5% to 50% of the silicon atoms, wherein R3 is an alkenyl group having from 2 to 5 carbon atoms, acrylic group or epoxy group.

The present invention provides, for example, the following kinds of integrated circuits:

- 10       – an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 6 carbon atoms and R1 is a substituent at position 4 of R2;
- 15       – an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is a polycyclic or bridged ring  
20       structure and R1 is a substituent at position 4 of R2 selected from H, D, F, OH, an alkyl group having from 1 to 4 carbon atoms, and an alkenyl group having from 2 to 5 carbon atoms;
- 25       – an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 8 carbon atoms and R1 is a substituent at position 5 of R2; and
- 30       – an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the

silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2.

A computer according to the invention comprises an integrated circuit of the above kind,  
5 having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 6 carbon atoms and R1 is a substituent at position 4 of R2). It  
10 can also have a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is a polycyclic or bridged ring structure and R1 is a substituent at position 4 of  
15 R2. Further, the integrated circuit of the computer can have a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is a polycyclic or bridged ring structure  
20 and R1 is a substituent at position 4 of R2.

A computer according to the invention can further comprise an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound  
25 comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 8 carbon atoms and R1 is a substituent at position 5 of R2) or having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane)  
30 compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2.

In the method for making an integrated circuit, alternating areas of electrically insulating and electrically conducting materials within a layer on a semiconductor substrate, wherein the electrically insulating material comprises any of the above poly(organo siloxane) compounds.

5

The chemical compounds of the formula  $R1-R2-Si-(X2)_3$ , wherein  $X2$  is a halogen or an alkoxy group,  $R2$  is an aromatic group having 6 carbon atoms and  $R1$  is a substituent at position 4 of  $R2$ ,  $R1$  being selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, or OH, can be produced by a

10 (Grignard-type) process comprising the steps of:

- reacting  $R1-R2-Br$  with Mg and  $Si-(OR3)_4$  to form  $R1-R2-Si-(OR3)_3 + BrMgOR$ , where  $R1$  is selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl having from 2 to 5 carbon atoms,  $R2$  is an aromatic or non-aromatic ring structure having from 5 to 7 carbon atoms, and  $R3$  is an alkoxy group having from
- 15 1 to 3 carbon atoms; and
- reacting  $R1-R2-Si-(OR3)_3$  with 3  $SO_2Cl_2$  in the presence of  $C_5H_5N-HCl$  to yield  $R1-R2-SiCl_3 + 3 SO_2 + 3EtCl$ .

Such a process can be used for preparing a chemical compound of the formula  $R1-R2-Si-(X2)_3$ , wherein  $X2$  is a halogen or alkoxy group,  $R2$  is an aromatic group and  $R1$  is a substituent at position 4 of  $R2$ ,  $R1$  being selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl, an alkynyl, F, whereby  $R1-R2-Br$  is reacted with Mg and  $Si-(OR3)_4$  to form  $R1-R2-Si-(OR3)_3 + BrMgOR$ , where  $R1$  is selected from an alkyl group having from 1 to 4 carbon atoms,  $R2$  is an aromatic or non-aromatic ring structure having

20 from 5 to 7 carbon atoms, and  $R3$  is an alkoxy group having from 1 to 3 carbon atoms; and  $R1-R2-Si-(OR3)_3$  is reacted with 3  $SO_2Cl_2$  in the presence of  $C_5H_5N-HCl$  to yield  $R1-R2-SiCl_3 + 3 SO_2 + 3EtCl$ .

Similarly, a chemical compound of the formula  $R1-R2-Si-(X2)_3$ , wherein  $X2$  is a halogen or alkoxy group,  $R2$  is an aromatic group having 8 carbon atoms and  $R1$  is a substituent at position 5 of  $R2$ ,  $R1$  being selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, or OH, can be prepared by reacting

30  $R1-R2-Br$  with Mg and  $Si-(OR3)_4$  to form  $R1-R2-Si-(OR3)_3 + BrMgOR$ , where  $R1$  is selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl having from 2 to

5 carbon atoms, R2 is an aromatic or non-aromatic ring structure having from 5 to 7 carbon atoms, and R3 is an alkoxy group having from 1 to 3 carbon atoms; and reacting R1-R2-Si-(OR3)3 with 3 SO2Cl2 in the presence of C5H5N-HCl to yield R1-R2-SiCl3 + 3 SO2 + 3EtCl.

5

A chemical compound of the formula R1-R2-Si-(X2)3, wherein X2 is a halogen or alkoxy group, R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2, R1 being selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, or OH, can be prepared by reacting

10

R1-R2-Br with Mg and Si-(OR3)4 to form R1-R2-Si-(OR3)3 + BrMgOR, where R1 is selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl having from 2 to 5 carbon atoms, R2 is an aromatic or non-aromatic ring structure having from 5 to 7 carbon atoms, and R3 is an alkoxy group having from 1 to 3 carbon atoms; and reacting

15

R1-R2-Si-(OR3)3 with 3 SO2Cl2 in the presence of C5H5N-HCl to yield R1-R2-SiCl3 + 3 SO2 + 3EtCl.

According to the invention, a thin film comprising a composition can be obtained by hydrolyzing a monomeric silicon compound having at least one hydrocarbyl radical, containing an unsaturated carbon-to-carbon bond, and at least one hydrolyzable group attached to the silicon atom of the compound with another monomeric silicon compound having at least one aryl group and at least one hydrolyzable group attached to the silicon atom of the compound to form a siloxane material.

In the above formulas, R1 is typically a linear or branched carbon chain having from 1 to 4 carbons, which is optionally fluorinated or perfluorinated. Thus, R1 can be selected from the group consisting of -CF3, -CF2CF3, -CF2CF2CF3, -CF2OH, -CF2CF2OH, -CF2(CF2)2OH, -CF2(CF2)2CF3, -CF2(CF2)3OH, a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons, a vinyl group, an acrylic group, an alkenyl group having from 1 to 4 carbons, and -Si-(X2)3, where X2 is a halogen (X1 is preferably chlorine or ethoxy, X2 is chlorine). R1 can also be -CH3, -CH2CH3, -CH2CH2CH3, -(CH2)CF3, -CH2CH2OH or -CH2CF2OH.

30

R<sub>2</sub> is an aromatic group selected from the group of aromatic groups having 5 or 6 carbon atoms and further substituted at positions 3 and 5. It can be substituted at positions 3 and 5 with a group -CF<sub>3</sub>.

- 5 In poly(organo siloxane) compounds comprising a repeating Si-O backbone, wherein there is a group R<sub>3</sub> bound to, for example, from 5% to 50% of the silicon atoms, such a group R<sub>3</sub> is an alkenyl group having from 2 to 5 carbon atoms, acrylic group or epoxy group. Typically, R<sub>3</sub> is an epoxy group, such as a glycidoxypentyl group, an acrylic group, an acryl group, such as a methacrylic group, an alkenyl group having from 2 to 5 carbon  
10 atoms, a vinyl group.

The compounds can also comprise R<sub>4</sub> groups bound to from 5 to 50% of the silicon atoms of the Si-O backbone, wherein R<sub>4</sub> is an alkyl group having from 1 to 4 carbon atoms. Examples of R<sub>4</sub> include CH<sub>3</sub>, CH<sub>2</sub>CH<sub>3</sub>, (CH<sub>2</sub>)<sub>2</sub>CH<sub>3</sub>, CF<sub>3</sub>, CF<sub>2</sub>CF<sub>3</sub> and (CF<sub>2</sub>)<sub>2</sub>CF<sub>3</sub>.

15

In one embodiment, the composition comprises a poly(organosiloxane) obtained by hydrolyzing a first silicon compound having the general formula I



20

I

wherein

Y1 represents a hydrolyzable group;

25

R1 is an aromatic group having 6 carbon atoms and R1 is a substituent at position 4 of R1 selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F;

30

R2 and R3 are independently selected from hydrogen, substituted or non-substituted alkyl groups, substituted or non-substituted alkenyl and alkynyl groups, and substituted or non-substituted aryl groups;

a is an integer 0, 1 or 2;

b is an integer a+1;

c is an integer 0, 1 or 2;

d is an integer 0 or 1; and

$$b + c + d = 3$$

with a second silicon compound having the general formula II

5



wherein Y2 represents a hydrolyzable group;

10

R4 is an aromatic group having 6 carbon atoms and R4 is a substituent at position 4 of R4 selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F;

15

R5 and R6 are independently selected from hydrogen, substituted or non-substituted alkyl groups, substituted or non-substituted alkenyl and alkynyl groups, and substituted or non-substituted aryl groups; e is an integer 0, 1 or 2;

20

f is an integer e+1;  
g is an integer 0, 1 or 2;  
h is an integer 0 or 1; and  
f + g + h = 3.

25

The present invention provides novel siloxane materials, which can be hydrolyzed and condensed (alone or with one or more other compounds) into a hybrid material having a (weight average) molecular weight of from 500 to 100,000 g/mol. The molecular weight can be in the lower end of this range (e.g., from 500 to 5,000 g/mol, or more preferably 500 to 3,000 g/mol) or the hybrid material can have a molecular weight in the upper end of this range (such as from 5,000 to 100,000 g/mol or from 10,000 to 50,000 g/mol). In addition, it may be desirable to mix a hybrid material having a lower molecular weight with a hybrid material having a higher molecular weight. The hybrid material can be suitably deposited such as by spin-on, spray coating, dip coating, or the like, as will be explained in more detail below.

30

The dielectric constant of the present materials can be lowered by rapid thermal curing (RTC), as described in our copending International Patent Application titled "Organo-silsesquioxane polymers for forming low-k dielectrics". However, it should be pointed out that the present materials can also be processed by conventional thermal processing.

5

The dielectric constant of the densified material is 2.70 or less, advantageously 2.60 or less, preferably 2.50 or less, in particular 2.40 or less, and suitably 2.30 or less. The CTE of the film is less than  $25 \times 10^{-6}$  1/degC.

- 10 The material can be characterized as being "nonporous" which, in the present context means, in particular, that the porosity is low, typically less than 25 %, preferably less than 20 %, in particular less than 15 % (by volume), and the average pore size is less than 5 nm, preferably less than 2 nm and in particular less than 1 nm. As a result of the processing, the electronic polarizability of the film is decreased more than 0.1 compared to a  
15 predetermined value obtained by conventional processing, as explained above.

- As mentioned above, the nonporous dielectric material can be subjected to annealing or a similar pretreatment or post-treatment of heated to the second temperature, i.e. the actual curing temperature. Annealing is carried out, e.g., by a process in which the material is  
20 subjected to UV radiation, DUV radiation, Extreme UV radiation, IR radiation or e-beam radiation or a combination thereof. The annealed material is then subjected to curing at an elevated temperature in air, nitrogen, argon, forming gas or vacuum.

- The pre-cure and rapid cure processes according to the present invention, result in a  
25 dielectric film free of silanols (less 0.5 wt-%).

The annealed and cured (densified, crosslinked) material can be subjected to deposition of a second layer selected from a metal, a barrier, a liner or an additional dielectric layer.

- 30 Based on the above, the present invention provides a process for preparing a siloxane-based dielectric material on a semiconductor substrate by hydrolysis and condensation of corresponding reactants, applying the prepared compositions on a substrate in the form of a thin layer, patterning the film by selective radiation and developing the radiated film and curing the formed structure.

As an embodiment of the above process, the material above is processed first by introducing a monomeric or polymerized material on a semiconductor substrate by a spin-on or CVD method, and then forming a siloxane polymer film on the semiconductor substrate by activating polymerization and densification reactions by rapid curing processing so as to produce a material having a relative dielectric constant lower than 2.6, preferably less than 2.5, in particular less than 2.4. Typically the dielectric constant is between 2.0 and <2.6.

10 The pore size of the nonporous dielectric material is less than 2 nm, the co-efficient of thermal expansion less than 25 ppm/degC, and the thermal decomposition temperature higher than 450 °C.

The electrically insulating material can be baked and patterned, with an electrically conductive material being deposited in removed areas of the patterned dielectric. The electrically conductive material comprises, for example, copper.

The above process is, e.g., a dual damascene process.

20 The deposition and patterning processes are described, for instance, in our earlier application PCT/FI03/00036, the disclosure of which is herewith incorporated by reference.

### Design of molecules

25

All actual calculations were done using Gaussian-98 computational chemistry program. The structures of each molecule were built using ChemDraw and Chem3D Pro programs. The Chem3D includes MOPAC package and the initial structural optimizations were done using AM1 theory.

30

In Gaussian LSDA theory was used to describe the exchange- and correlation. LSDA is a reliable method for electronic densities and quantities like that. It does not describe well the weak molecule-molecule bonds. In this molecule design work, the properties of interest are related to electron density.

The used basis set was cc-pVDZ. Also larger basis sets, viz. 6-311+(2d) and aug-cc-pVDZ, were tested. The dipole moments did not change much but the polarizations were found to be rather sensitive to the basis.

5

The structural optimizations were done starting from the Chem3D/AM1 optimized structures. In case of mol10, different conformations of the molecules were tested. The reported numbers were from the lowest energy structure. The optimization for the larger molecules was done using the loose option in Gaussian. This was necessary because the molecules are rather flexible, they will change their structures somewhat but the energy will not change much. This should not effect to the main conclusions or trends of the calculations. All structures were optimized with LSDA and cc-pVDZ basis.

The effective charges were computed using the Merz-Collman fitting procedure to reproduce the true electrostatic potential. (prop=fitcharge and pop=mk, keywords in Gaussian). The local dipole moments are based on these effective charges.

Last the bond stretching calculations were done using the optimized geometries and stretching a single bond with constant steps of 0.05 Å.

20


Based on the calculations, some molecules were synthesized as precursors to obtain low-k dielectric films with optimal electrical thermal and mechanical properties.

The synthesis methods involved the following steps. Generally, the Grignard reaction can be carried out at room temperature or at an elevated temperature (temperature 10 to 70 degC, in particular about 20 to 50 degC). Depending on the quality of the elemental magnesium used, it is possible or recommendable to add some iodine or to ultrasonicate the reaction mixture. In addition to the mild halogenating agent formed by the combination of thionyl chloride and pyridyl hydrochloride it is possible to use other agents capable of replacing the alkoxy groups with halogens without hydrolyzing or oxidizing the group R2. As an example of such substances, carbon tetrachloride can be mentioned.

30


Synthesis of molecules**(#1) 4-(trifluoromethyl)phenyl trichlorosilane, 4-(F<sub>3</sub>C)C<sub>6</sub>H<sub>4</sub>SiCl<sub>3</sub>***Preparation:*

5



First, 96.24g (0.427mol) 4-(trifluoromethyl)phenyl bromide, 10.38g (0.427mol) magnesium, and a small amount of iodine were stirred for half an hour. Then, 356.78g (382ml, 1.708mol) Si(OEt)<sub>4</sub> was added to the solution. Et<sub>2</sub>O was added until exothermic reaction occurred (~200ml) and the solution was refluxed overnight. Et<sub>2</sub>O was evaporated off and 250ml n-heptane added. Mg-salts were filtered off, and n-heptane evaporated. The remaining 4-(F<sub>3</sub>C)C<sub>6</sub>H<sub>4</sub>Si(OEt)<sub>3</sub> was purified by distillation. Bp 68 °C /1mbar. Yield 50.22g (38%).

15



The product of the preceding steps, viz. 50.22g (0.163mol) 4-(trifluoromethyl)phenyl triethoxysilane, was mixed with 83mL (1.140mol, 135.62g) thionylchloride and 2.45g (0.021mol) pyridinium hydrochloride, and the mixture was refluxed and stirred for 16 h. Excess of SO<sub>2</sub>Cl<sub>2</sub> was evaporated and the residue was fractionally distilled to obtain 37g (81%) 4-(trifluoromethyl)phenyl trichlorosilane. Bp 44 °C / 4.0mbar.

25

*Characterization:*

4-(trifluoromethyl)phenyl triethoxysilane, 4-(CF<sub>3</sub>)C<sub>6</sub>H<sub>4</sub>Si(OEt)<sub>3</sub>

*NMR (Et<sub>2</sub>O):*

<sup>29</sup>Si : -63.0 ppm

30

- <sup>13</sup>C: 139.3 ppm (C<sub>1</sub>)  
 137.4 ppm (C<sub>2,6</sub>)  
 126.4 ppm (C<sub>3,5</sub>)  
 134.4 ppm (qu, C<sub>4</sub>), <sup>2</sup>J<sub>C4-F</sub> 31.7 Hz  
 126.6 ppm (qu, C<sub>7</sub>), <sup>1</sup>J<sub>C7-F</sub> 271.4 Hz  
 60.8 ppm (C<sub>8</sub>)  
 20.0 ppm (C<sub>9</sub>)

4-(trifluoromethyl)phenyl trichlorosilane, 4-(CF<sub>3</sub>)C<sub>6</sub>H<sub>4</sub>SiCl<sub>3</sub>


10 *NMR (Et<sub>2</sub>O):*

- <sup>29</sup>Si : -1.5 ppm  
<sup>13</sup>C : 138.1 ppm (C<sub>1</sub>)  
 136.0 ppm (C<sub>2,6</sub>)  
 127.7 ppm (C<sub>3,5</sub>)  
 137.0 ppm (qu, C<sub>4</sub>), <sup>2</sup>J<sub>C4-F</sub> 33.3 Hz  
 125.9 ppm (qu, C<sub>7</sub>), <sup>1</sup>J<sub>C7-F</sub> 272.2 Hz  
<sup>19</sup>F: -65.3 ppm

(#2) 3,5-Bis(trifluoromethyl)phenyl trichlorosilane, 3,5-(F<sub>3</sub>C)<sub>2</sub>C<sub>6</sub>H<sub>3</sub>SiCl<sub>3</sub>


20

*Preparation:*

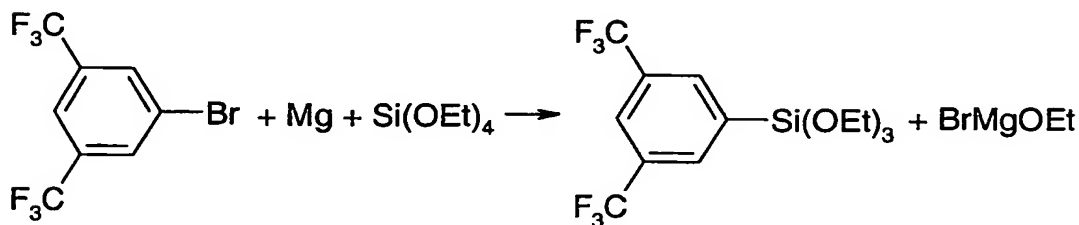

- 25 First, 125.11g (0.427mol) 3,5-bis(trifluoromethyl)phenyl bromide, 10.38g (0.427mol) magnesium, and a small amount of iodine were stirred for half an hour. Then, 356.78g (382ml, 1.708mol) Si(OEt)<sub>4</sub> were added to the solution. Et<sub>2</sub>O was added until exothermic reaction occurred (~200ml) and the solution was refluxed overnight. Et<sub>2</sub>O was evaporated off and 250ml n-heptane added. The Mg-salts were filtered off and n-heptane evaporated.


The remaining 3,5-(F<sub>3</sub>C)<sub>2</sub>C<sub>6</sub>H<sub>3</sub>Si(OEt)<sub>3</sub> was purified by distillation. Bp 80 °C /0.8mbar.  
Yield 78.72g (52%).

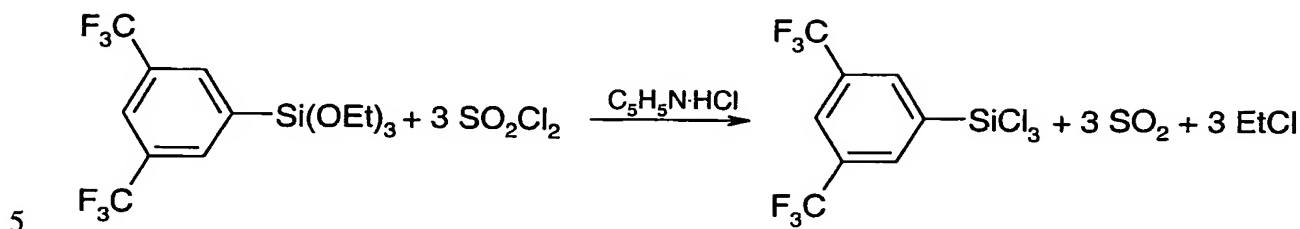

10 The product of the preceding step, viz. 61.35g (0.163mol) 3,5-bis(trifluoromethyl)phenyl triethoxysilane, was mixed with 83mL (1.140mol, 135.62g) thionylchloride and 2.45g (0.021mol) pyridinium hydrochloride, and the mixture was refluxed and stirred for 16 h. Excess of SO<sub>2</sub>Cl<sub>2</sub> was evaporated and the residue was fractionally distilled to obtain 44.2g (78%) of 3,5-bis(trifluoromethyl)phenyl trichlorosilane. Bp 41 °C / 3.1mbar.







15 **(#3) Pentafluorophenyl methyl trichlorosilane, C<sub>6</sub>F<sub>5</sub>CH<sub>2</sub>SiCl<sub>3</sub>**






*Preparation:*

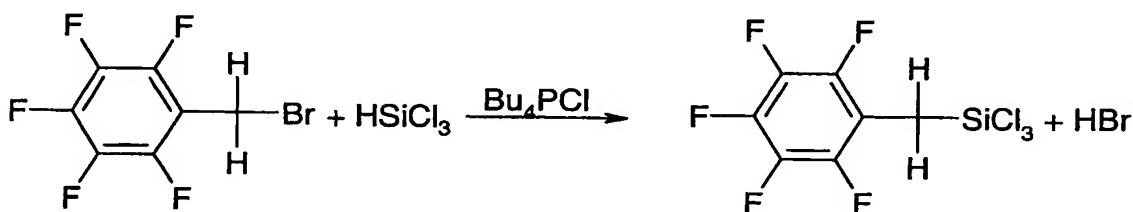

First, 106.29g (0.407mol) pentafluorophenylmethyl bromide, 1.20g (0.004mol) Bu<sub>4</sub>PCl, and 187.55g (140ml, 1.385mol) HSiCl<sub>3</sub> were added to high pressure vessel. The solution was heated to 150 °C for four hours. Excess HSiCl<sub>3</sub> was evaporated and C<sub>6</sub>F<sub>5</sub>CH<sub>2</sub>SiCl<sub>3</sub> was purified by distillation. Bp 56 °C /2.4mbar. Yield 91.18g (71%).

25 Other applicable precursors based on molecular modeling are, but not limited to, the following:

#4		Pentafluorophenyl ethyl trichlorosilane
#5		Norbornyl trichlorosilane
#6		Pentafluoronorbornyl trichlorosilane
#7		3,4,5-trimethylphenyl trichlorosilane
#8		Adamantyl trichlorosilane
#9		3,5,7-trifluoroadamantyl trichlorosilane
#10		3,5,7-trifluoromethyladamantyl trichlorosilane

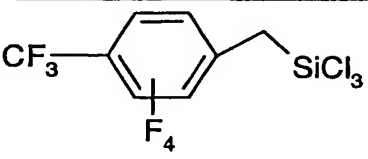		
(#11)		Adamantylphenyl trichlorosilane
(#12)		3-trifluoromethyl-4-(methyl)phenyl trichlorosilane
(#13)		5-trifluoromethylcyclooctatetraenetrichlorosilane
(#14)		4-trifluoromethyltetrafluorophenyl methyl trichlorosilane

### Synthesis of polymers

#### 5 Example A

4-(trifluoromethyl)phenyl trichlorosilane 80 mole-%

Vinyl trichlorosilane (0.05 mol), 4-trifluoromethyl phenyl trichlorosilane (0.80 mol) and methyl trichlorosilane (0.15 mol) are dissolved in dehydrated DCM (800 ml). The solution

is added drop-wise into a flask containing excess of water (45 mol) while stirring the solution. After addition of water, the solution stirred for 1 hour at the room temperature. The solution is neutralized by water extraction for 12 times and finally volatile components are evaporated with rotary evaporator. After vacuum treatment, dehydrated 300 w-% of mesitylene used as process solvent is added into the material and the material is carefully homogenized. Appropriate initiators are added and dissolved into the mixture. Finally the material is filtered.

### Example B

10 Pentafluorophenyl methyl trichlorosilane 80 mole-%

Vinyl trichlorosilane (0.05 mol), pentafluorophenyl methyl trichlorosilane (0.80 mol) and methyl trichlorosilane (0.15 mol) are dissolved in dehydrated DCM (800 ml). The solution is added drop-wise into a flask containing excess of water (45 mol) while stirring the solution. After addition of the water, the solution stirred for 1 hour at the room temperature. The solution is neutralized by water extraction for 12 times and finally volatile components are evaporated with rotary evaporator. After vacuum treatment, dehydrated 300 w-% of mesitylene used as process solvent is added into the material and the material is carefully homogenized. Appropriate initiators are added and dissolved into the mixture. Finally the material is filtered.

Alternative procedures for each stage:

Instead of DCM (dichloromethane) as a solvent any pure solvent or a mixture of solvents/alternate solvents can be used either by themselves or in combinations. Traditional methods of selecting solvents by using Hansen type parameters can be used to optimize these systems. Examples of suitable solvents are acetone, dichloromethane, chloroform, diethyl ether, ethyl acetate, methyl-isobutyl ketone, methyl ethyl ketone, acetonitrile, ethylene glycol dimethyl ether, triethylamine, formic acid, nitromethane, 1,4-dioxane, pyridine, acetic acid, di-isopropyl ether, toluene, carbon disulphide, carbon tetrachloride, benzene, methylcyclohexane, chlorobenzene. Water used in the reaction can be dissolved into pure or mixtures of following solvents: acetone, dichloromethane, chloroform, diethyl ether, ethyl acetate, methyl-isobutyl ketone, methyl ethyl ketone, acetonitrile, ethylene glycol dimethyl ether, triethylamine, formic acid, nitromethane, 1,4-dioxane, pyridine,

acetic acid, di-isopropyl ether, toluene, carbon disulphide, carbon tetrachloride, benzene, methylcyclohexane, chlorobenzene. In place of water, the following reagents can be used: deuterium oxide ( $D_2O$ ) or HDO. A part of the water can be replaced with the following reagents: alcohols, deuterium alcohols, fluorinated alcohols, chlorinated alcohols,

- 5 fluorinated deuterated alcohols, chlorinated deuterated alcohols. The reaction mixture may be adjusted to any appropriate temperature. Water can be added into the precursor solution. Even less than an equivalent amount of water can be used.

- 10 Instead of water extraction, neutralization (removal of the hydrochloric acid) can be performed using the following chemicals: sodium hydrogen carbonate ( $NaHCO_3$ ), pure potassium hydrogen carbonate ( $KHCO_3$ ), ammonium hydrogen carbonate ( $NH_4HCO_3$ ), sodium carbonate ( $Na_2CO_3$ ), potassium carbonate ( $K_2CO_3$ ), sodium hydroxide ( $NaOH$ ), potassium hydroxide ( $KOH$ ), calcium hydroxide ( $Ca(OH)_2$ ), magnesium hydroxide ( $Mg(OH)_2$ ), ammonia ( $NH_3$ ), trialkylamines ( $R_3N$ , where R is hydrogen or a linear or
- 15 branched chain  $C_xH_y$ ,  $x < 10$ , as for example in triethylamine, or heteroatom containing as for example in triethanol amine), trialkyl ammonium hydroxides ( $R_3NOH$ ,  $R_3N$ , wherein R is hydrogen or straight / branched chain  $C_xH_y$ ,  $x < 10$ ), alkali metal silanates, alkali metal silaxonates, alkali metal carboxylates. All neutralization reagents can be added into the reaction mixture also as a solution of any appropriate solvent. Acidic or basic water
- 20 solution can be used in the extraction. Neutralization can be performed also with standard evaporation under vacuum or with azeotropic water evaporation. Procedure for azeotropic water evaporation: The solvent is evaporated off after the hydrolysis. The material is dissolved into mixture of water and one of the following solvents (1:10 volume/volume): tetrahydrofuran, ethanol, acetonitrile, 2-propanol, tert-butanol, ethylene glycol dimethyl
- 25 ether, 2-propanol. The formed solution is evaporated to dryness. The material is dissolved again into the same mixture of water and the solvent. Evaporation and addition cycle is repeated until pH value of the material solution is 7. The solvent is then evaporated with rotary evaporator. The pressure in this stage can be in a large range. The material can be heated while vacuum treatment.

30

The molecular weight of formed polymer can be increased by using base or acid catalyzed polymerizations. By increasing the molecular weight, the mechanical properties of the film can be improved. On the other hand, a too large molecular weight may impair the film-forming process, e.g. the spinning. Thus, by controlling the molecular weight of the

hydrolysed composition, processing of the composition and the properties of the film can be adjusted.

5 In the following, the procedures for increasing the molecular weight are described in more detail:

**Procedure for acid catalyzed polymerization:** The pure material is dissolved into any appropriate solvent, such as tetrahydrofuran, ethanol, acetonitrile, 2-propanol, tert-butanol, ethylene glycol dimethyl ether, 2-propanol, toluene, dichloromethane, xylene, chloroform, diethyl ether, ethyl acetate, or methyl-isobutyl ketone. Into the solution, a catalytic amount of an acid, such as triflic acid, monofluoro acetic acid, trifluoro acetic acid, trichloro acetic acid, dichloro acetic acid, monobromo acetic acid, is added. The solution is refluxed for few hours or until polymerization has reached the desired level while water formed in the reaction is removed. After polymerization, the acid catalyst is removed from the material solution completely, for example by using solvent extraction or other methods described in alternative neutralization section. Finally, the solvent is removed.

**Procedure for base catalyzed polymerization:** The pure material is dissolved into any appropriate solvent, such as tetrahydrofuran, ethanol, acetonitrile, 2-propanol, tert-butanol, ethylene glycol dimethyl ether, 2-propanol, toluene, dichloromethane, xylene, chloroform, diethyl ether, ethyl acetate, or methyl-isobutyl ketone. Into the solution, a catalytic amount of a base, such as triethanol amine, triethyl amine, pyridine, ammonia, or tributyl ammonium hydroxide, is added. The solution is refluxed for few hours or until polymerization has reached the desired level while water formed during the reaction is removed. After polymerization, the base catalyst is removed from the material solution completely, for example by adding acidic water solution into the material solution. After that, the acidic solution is neutralized using solvent extraction or other methods described in alternative neutralization section. Finally, the solvent is removed.

30 In place of mesitylene it is possible to use any or a mixture of the following solvents: methyl-isobutyl ketone, 2-propanol, ethanol, butyl acetate, methanol, 1-propanol, tetrahydrofuran, acetone, nitromethane, chlorobenzene, dibutyl ether, cyclohexanone, 1,1,2,2-tetrachloroethane, trichloroethanes, ethyl lactate, 1,2-propanediol monomethyl ether acetate, carbon tetrachloride, perfluoro toluene, perfluoro p-xylene, perfluoro iso-

propanol, tetraethylene glycol, 2-octanol, dimethyl sulfoxide, 2-ethyl hexanol, 3-octanol, diethyleneglycol butyl ether, diethyleneglycol dibutyl ether, diethylene glycol dimethyl ether, n-propoxy propanol, 1,2,3,4-tetrahydronaphthalene or trimethylol propane triacrylate.

- 5 The material solution can be acidified using, e.g., the following acids: acetic acid, formic acid, propanoic acid, monofluoro acetic acid, trifluoro acetic acid, trichloro acetic acid, dichloro acetic acid, monobromo acetic acid. Also the following basic compounds can be added to the material solution: triethyl amine, triethanol amine, pyridine, N-methyl pyrrolidone. Mesitylene or any other synthesis or process solvent can be introduced in any
- 10 stage by keeping material all the time in liquid form. Therefore formation of solvent free material during synthesis between certain stages is not necessary. This sometimes beneficial operation can be done by using so called solvent replacement method. In this method a solvent having lower boiling point can be replaced in the solution with another solvent having higher boiling point. By adding higher boiling point solvent into the
- 15 solution followed by evaporation-addition -cycles, the solvent with lower boiling point will be replaced gradually with the other solvent or solvent mixture of any desired dilution.

- Photoinitiators that can be used are Irgacure 184, Irgacure 500, Irgacure 784, Irgacure 819, Irgacure 1300, Irgacure 1800, Darocure 1173 and Darocure 4265. The initiator can be
- 20 highly fluorinated, such as 1,4-bis(pentafluorobenzoyl)benzene or Rhodosil 2074. Thermal initiators which can be used include benzoyl peroxide, 2,2'-azobisisobutyronitrile, 1,1'-azobis(cyclohexanecarbo-nitrile), tert.-butyl hydroperoxide, dicumyl peroxide and lauroyl peroxide, but are not limited to these. Thermal initiators are optimized for their reactivity, thermal stability as well as chain transfer efficiencies. Typical radical initiators listed
- 25 below work well with the system as well as other charge transfer catalysts that can be used as initiators.

- Anhydrous inorganic compounds, including but not limited to sulfate compounds, such as sodium sulfate ( $\text{Na}_2\text{SO}_4$ ) and magnesium sulfate ( $\text{MgSO}_4$ ), may be used to remove water
- 30 and moisture out of organic as well as organic-inorganic solutions. These compounds are insoluble in most organic solvents and they easily bind water to so called crystal water.

The present invention describes the use of anhydrous inorganic compounds as novel and effective drying (removal of water) agents of metalalkoxide and organo-metal chloride

based optical materials in ethyl acetate, toluene or tetrahydrofurane solutions. Removal of water and moisture is crucial to minimize optical losses due the entrapped water molecules into the final optical material. The drying is proceeded by adding appropriate amounts of drying agent into the solution. The amount depends on the character of the drying agent  
5 and on the amount of water to be removed. It is safe to use an excess of the drying agent. The dried solution is then filtered and the solvent evaporated off. Traces of solvents are removed with high vacuum treatment.

Tetrahydrofurane, ethyl acetate and toluene form an azeotrope with water when boiled. So  
10 if the drying with these agents is not complete the remaining water is removed when the solvent is evaporated.

The use of drying agents may slightly increase the concentration of inorganic impurities of the optical material at least if the drying is not completed before evaporation of the solvent.  
15

The materials disclosed herein can be used in methods and devices such as set forth in Exhibit A attached herein.

**We claim:**

1. A chemical compound of the general formula



wherein

$X_1$  is a leaving group,

10  $R_2$  is a cycloalkyl having from 3 to 16 carbon atoms, an aryl having from 5 to 18 carbon atoms or a polycyclic alkyl group having from 7 to 16 carbon atoms, and

$R_1$  is a substituent of  $R_2$  selected from alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, alkynyl groups having from 2 to 5 carbon atoms, and aromatic groups having 5 or 6 carbon atoms, each of said groups being optionally substituted, and Cl and F.

15

2. The chemical compound of claim 1, wherein

$X_1$  is a leaving group selected from halogen, acyloxy, alkoxy and OH groups,

20  $R_2$  is an aromatic group having 5 or 6 carbon atoms or a non-aromatic ring structure having from 5 to 7 carbons, and

$R_1$  is a substituent at position 4 of  $R_2$  selected from alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, alkynyl groups having from 2 to 5 carbon atoms, and aromatic groups having 5 or 6 carbon atoms, each of said groups being optionally substituted, and Cl and F.

25

3. The compound of claim 1 or 2, wherein  $R_1$  is a linear or branched carbon chain having from 1 to 4 carbons, which is optionally fluorinated or perfluorinated.

4. The compound of any of claims 1 to 3, wherein

30  $R_1$  is selected from the group consisting of  $-CF_3$ ,  $-CF_2CF_3$ ,  $-CF_2CF_2CF_3$ ,  $-CF_2OH$ ,  $-CF_2CF_2OH$ ,  $-CF_2(CF_2)_2OH$ ,  $-CF_2(CF_2)_2CF_3$ ,  $-CF_2(CF_2)_3OH$ , a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons, a vinyl group, an acrylic group, an alkenyl group having from 1 to 4 carbons, and  $-Si-(X_2)_3$ , where  $X_2$  is a halogen.

5. The compound of any of claims 1 to 4, wherein  $X_1$  is chlorine or ethoxy,
6. The compound according to claim 4 or 5, wherein  $X_2$  is chlorine.
- 5 7. The compound of any of claims 1 to 6, wherein  $R_2$  is an aromatic group selected from the group of aromatic groups having 5 or 6 carbon atoms and further being substituted at positions 3 and 5.
8. The compound of claim 7, wherein  $R_2$  is substituted at positions 3 and 5 with a group
- 10  $-\text{CF}_3$ .
9. The compound of claim 1 or 2, wherein  $R_1$  is  $-\text{CH}_3$ ,  $-\text{CH}_2\text{CH}_3$ ,  $-\text{CH}_2\text{CH}_2\text{CH}_3$ ,  $-(\text{CH}_2)\text{CF}_3$ ,  $-\text{CH}_2\text{CH}_2\text{OH}$  or  $-\text{CH}_2\text{CF}_2\text{OH}$ .
- 15 10. A poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain cross-linking groups and  $-\text{R}_1-\text{R}_2$  bound to from 5 % to 50 % of the silicon atoms in the Si-O backbone, wherein  $R_2$  is an aromatic group having 6 carbon atoms and  $R_1$  is a substituent at position 4 of  $R_2$ .
- 20 11. The compound of claim 10, wherein
- $X_1$  is a halogen, acyloxy, alkoxy or OH group,
- $R_2$  is an aromatic group having 5 or 6 carbon atoms or a non-aromatic ring structure having from 5 to 7 carbons, and
- $R_1$  is a substituent at position 4 of  $R_2$  selected from alkyl groups having from 1 to 4 carbon
- 25 atoms, alkenyl groups having from 2 to 5 carbon atoms, alkynyl groups having from 2 to 5 carbon atoms, and aromatic groups having 5 or 6 carbon atoms, each of said groups being optionally substituted, and Cl and F.
12. The compound of claim 10 or 11, wherein  $R_1$  is a linear or branched carbon chain
- 30 having from 1 to 4 carbons, which is optionally fluorinated or perfluorinated.
13. The compound of any of claims 10 to 12, wherein  $R_1$  is selected from the group consisting of  $-\text{CF}_3$ ,  $-\text{CF}_2\text{CF}_3$ ,  $-\text{CF}_2\text{CF}_2\text{CF}_3$ ,  $-\text{CF}_2\text{OH}$ ,  $-\text{CF}_2\text{CF}_2\text{OH}$ ,  $-\text{CF}_2(\text{CF}_2)_2\text{OH}$ ,  $-\text{CF}_2(\text{CF}_2)_2\text{CF}_3$ ,

$-\text{CF}_2(\text{CF}_2)_3\text{OH}$ , a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons, a vinyl group, an acrylic group, an alkenyl group having from 1 to 4 carbons, and  $-\text{Si}(\text{X}_2)_3$ , where  $\text{X}_2$  is a halogen.

5 14. The compound of any of claims 10 to 13, wherein  $\text{X}_1$  is chlorine or ethoxy,

15. The compound according to claims 13 or 14, wherein  $\text{X}_2$  is chlorine.

10 16. The compound of any of claims 10 to 15, wherein  $\text{R}_2$  is an aromatic group selected from the group of aromatic groups having 5 or 6 carbon atoms and further being substituted at positions 3 and 5.

17. The compound of claim 16, wherein  $\text{R}_2$  is substituted at positions 3 and 5 with a group  $-\text{CF}_3$ .

15

18. The compound of claim 10, wherein  $\text{R}_1$  is  $-\text{CH}_3$ ,  $-\text{CH}_2\text{CH}_3$ ,  $-\text{CH}_2\text{CH}_2\text{CH}_3$ ,  $-(\text{CH}_2)\text{CF}_3$ ,  $-\text{CH}_2\text{CH}_2\text{OH}$  or  $-\text{CH}_2\text{CF}_2\text{OH}$ . wherein  $\text{R}_1$  is a carbon chain of from 1 to 4 carbons.

20 19. The compound of claim 10, wherein  $\text{R}_1$  is a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons.

20. The compound of claim 19, wherein  $\text{R}_1$  is a vinyl group.

25 21. The compound of claim 19, wherein  $\text{R}_1$  is an acrylic group.

22. The compound of claim 10, wherein  $\text{R}_2$  is a non-aromatic ring structure having from 5 to 7 carbons.

30 23. The compound of claim 10, wherein the Si-O backbone further comprises  $\text{R}_3$  groups bound to from 5% to 25% of the silicon atoms in the Si-O backbone, wherein  $\text{R}_3$  is an alkyl chain having from 1 to 4 carbon atoms, an alkenyl chain or aryl group

24. The compound of claim 23, wherein R<sub>3</sub> is a non-fluorinated or partially fluorinated or perfluorinated hydrocarbon chain.

25. The compound of claim 24, wherein R<sub>3</sub> is CF<sub>3</sub>, CH<sub>3</sub>, CH<sub>2</sub>CH<sub>3</sub>, or CF<sub>2</sub>CF<sub>3</sub>.

5

26. The compound of claim 23, wherein R<sub>3</sub> is a carbon chain having from 1 to 4 carbon atoms and an -OH group.

27. The compound of claim 26, wherein R<sub>3</sub> is CF<sub>2</sub>OH or CF<sub>2</sub>CF<sub>2</sub>OH.

10

28. The compound of claim 26, having a dielectric constant of 2.7 or less, preferably 2.5 or less, in particular 2.3 or less.

29. A poly(organo siloxane) compound comprising a repeating Si-O backbone, -R<sub>1</sub>-R<sub>2</sub> bound to from 25% to 50% of the silicon atoms in the Si-O backbone, wherein R<sub>2</sub> is an aromatic group having 6 carbon atoms and R<sub>1</sub> is a substituent at position 4 of R<sub>2</sub> (again this could be drawn out for clarity), and R<sub>3</sub> bound to from 5% to 50% of the silicon atoms, wherein R<sub>3</sub> is an alkenyl group having from 2 to 5 carbon atoms, acrylic group or epoxy group.

20

30. The compound of claim 29, wherein R<sub>1</sub> is a linear or branched carbon chain having from 1 to 4 carbons, which is optionally fluorinated or perfluorinated.

31. The compound of claim 29 or 30, wherein

25 R<sub>1</sub> is selected from the group consisting of -CF<sub>3</sub>, -CF<sub>2</sub>CF<sub>3</sub>, -CF<sub>2</sub>CF<sub>2</sub>CF<sub>3</sub>, -CF<sub>2</sub>OH, -CF<sub>2</sub>CF<sub>2</sub>OH, -CF<sub>2</sub>(CF<sub>2</sub>)<sub>2</sub>OH, -CF<sub>2</sub>(CF<sub>2</sub>)<sub>2</sub>CF<sub>3</sub>, -CF<sub>2</sub>(CF<sub>2</sub>)<sub>3</sub>OH, a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons, a vinyl group, an acrylic group, an alkenyl group having from 1 to 4 carbons, and -Si-(X<sub>2</sub>)<sub>3</sub>, where X<sub>2</sub> is a halogen.

30 32. The compound of any of claims 29 to 30, wherein X<sub>1</sub> is chlorine or ethoxy,

33. The compound according to claim 31 or 32, wherein X<sub>2</sub> is chlorine.

34. The compound of any of claims 29 to 33, wherein  $R_2$  is an aromatic group selected from the group of aromatic groups having 5 or 6 carbon atoms, such as phenyl, and further being substituted at positions 3 and 5.

5 35. The compound of claim 34, wherein  $R_2$  is substituted at positions 3 and 5 with a group  $-CF_3$ .

36. The compound of claim 29, wherein  $R_1$  is  $-CH_3$ ,  $-CH_2CH_3$ ,  $-CH_2CH_2CH_3$ ,  $-(CH_2)CF_3$ ,  $-CH_2CH_2OH$  or  $-CH_2CF_2OH$ .

10

37. The compound of claim 29, wherein  $R_3$  is an epoxy group, such as a glycidoxypentyl group, an acrylic group, an acryl group, such as a methacrylic group, an alkenyl group having from 2 to 5 carbon atoms, a vinyl group.

15 38. The compound of any of claims 29 to 37, further comprising  $R_4$  groups bound to from 5 to 50% of the silicon atoms of the Si-O backbone, wherein  $R_4$  is an alkyl group having from 1 to 4 carbon atoms.

20 39. The compound of claim 38, wherein  $R_4$  is  $CH_3$ ,  $CH_2CH_3$ ,  $(CH_2)_2CH_3$ ,  $CF_3$ ,  $CF_2CF_3$  or  $(CF_2)_2CF_3$ .

40. The compound of any of claims 29 to 39, having a dielectric constant of 2.7 or less, preferably 2.5 or less, in particular 2.5 or less.

25 41. An integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and  $-R_1-R_2$  bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein  $R_2$  is an aromatic group having 6 carbon atoms and  $R_1$  is a substituent  
30 at position 4 of  $R_2$ .

42. The circuit of claim 41, wherein  $R_1$  is a linear or branched carbon chain having from 1 to 4 carbons, which is optionally fluorinated or perfluorinated.

43. The compound of claim 41 or 42, wherein

$R_1$  is selected from the group consisting of  $-\text{CF}_3$ ,  $-\text{CF}_2\text{CF}_3$ ,  $-\text{CF}_2\text{CF}_2\text{CF}_3$ ,  $-\text{CF}_2\text{OH}$ ,  $-\text{CF}_2\text{CF}_2\text{OH}$ ,  $-\text{CF}_2(\text{CF}_2)_2\text{OH}$ ,  $-\text{CF}_2(\text{CF}_2)_2\text{CF}_3$ ,  $-\text{CF}_2(\text{CF}_2)_3\text{OH}$ , a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons, a vinyl group, an acrylic group, an alkenyl group having from 1 to 4 carbons, and  $-\text{Si}(\text{X}_2)_3$ , where  $\text{X}_2$  is a halogen.

44. The compound of any of claims 41 to 43, wherein  $\text{X}_1$  is chlorine or ethoxy,

45. The compound according to claim 43 or 44, wherein  $\text{X}_2$  is chlorine.

46. The compound of any of claims 42 to 45, wherein  $R_2$  is an aromatic group selected from the group of aromatic groups having 5 or 6 carbon atoms, such as phenyl, and further being substituted at positions 3 and 5.

47. The compound of claim 46, wherein  $R_2$  is substituted at positions 3 and 5 with a group  $-\text{CF}_3$ .

48. The compound of claim 42, wherein  $R_1$  is  $-\text{CH}_3$ ,  $-\text{CH}_2\text{CH}_3$ ,  $-\text{CH}_2\text{CH}_2\text{CH}_3$ ,  $-(\text{CH}_2)\text{CF}_3$ ,  $-\text{CH}_2\text{CH}_2\text{OH}$  or  $-\text{CH}_2\text{CF}_2\text{OH}$ .

49. The compound of claim 42, wherein  $R_2$  is a non-aromatic ring structure having from 5 to 7 carbons.

50. The compound of any of claims 42 to 49, wherein  $\text{X}_1$  is an alkoxy group, ethoxy group, acyloxy group, an OH group.

51. The compound of any of claims 42 to 50, wherein  $R_1$  is  $\text{CH}_2$ ,  $\text{CH}_2\text{CH}_3$ ,  $(\text{CH}_2)_2\text{CH}_3$ ,  $(\text{CH}_2)\text{CF}_3$ ,  $\text{CH}_2\text{CH}_2\text{OH}$  or  $\text{CH}_2\text{CF}_2\text{OH}$ .

52. A computer comprising an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and  $-\text{R}_1-\text{R}_2$  bound to from 5% to 50% of the

silicon atoms in the Si-O backbone, wherein R<sub>2</sub> is an aromatic group having 6 carbon atoms and R<sub>1</sub> is a substituent at position 4 of R<sub>2</sub>).

53. A method for making an integrated circuit, comprising providing alternating areas of electrically insulating and electrically conducting materials within a layer on a semiconductor substrate, wherein the electrically insulating material comprises a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R<sub>1</sub>-R<sub>2</sub> bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R<sub>2</sub> is an aromatic group having 6 carbon atoms and R<sub>1</sub> is a substituent at position 4 of R<sub>2</sub> selected from an alkyl chain having from 1 to 4 carbons, an alkenyl group having from 2 to 6 carbons or OH.

54. The method of claim 53, wherein the electrically insulating material is deposited, baked and patterned, with the electrically conductive material being deposited in removed areas of the patterned dielectric.

55. The method of claim 54, wherein the electrically conductive material comprises copper.

56. The method of claim 55, which is a dual damascene process.

57. A method of making a chemical compound of the formula R<sub>1</sub>-R<sub>2</sub>-Si-(X<sub>2</sub>)<sub>3</sub>, wherein X<sub>2</sub> is a halogen, R<sub>2</sub> is an aromatic group having 5 to 18 carbon atoms, a cycloalkyl having from 3 to 16 carbon atoms, or a polycyclic alkyl group having from 7 to 16 carbon atoms, and R<sub>1</sub> is a substituent, in particular at position 4 of R<sub>2</sub>, R<sub>1</sub> being selected from the group consisting of alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, and OH groups, comprising:

- reacting a compound of the formula R<sub>1</sub>-R<sub>2</sub>-Br, wherein R<sub>1</sub> and R<sub>2</sub> have the same meaning as above, with Mg and with a compound of the formula Si-(OR<sub>3</sub>)<sub>4</sub>, wherein R<sub>3</sub> is an alkoxy group having from 1 to 3 carbon atoms, to form a compound of the formula R<sub>1</sub>-R<sub>2</sub>-Si-(OR<sub>3</sub>)<sub>3</sub>, wherein R<sub>1</sub>, R<sub>2</sub> and R<sub>3</sub> have the same meaning as above;
- reacting the thus obtained compound of the formula R<sub>1</sub>-R<sub>2</sub>-Si-(OR<sub>3</sub>)<sub>3</sub> with a halogenating agent capable of replacing, preferably each, R<sub>3</sub> with a halogen

substantially without affecting the rest of the compound of formula  $R_1-R_2-Si-(OR_3)_3$  to produce a compound of the formula  $R_1-R_2-SiX_2$ , wherein  $R_1$ ,  $R_2$  and  $X_2$  have the same meaning as above, and

- recovering the thus obtained compound.

5

58. The of claim 57 for making a chemical compound of the formula  $R_1-R_2-Si-(X_1)_3$ , wherein  $X_1$  is a halogen or alkoxy group,  $R_2$  is an aromatic group having 6 carbon atoms and  $R_1$  is a substituent at position 4 of  $R_2$ ,  $R_1$  being selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, or OH, comprising:

10

- reacting  $R_1-R_2-Br$  with  $Mg$  and  $Si-(OR_3)_4$  to form  $R_1-R_2-Si-(OR_3)_3 + BrMgOR$ , where  $R_1$  is selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl having from 2 to 5 carbon atoms,  $R_2$  is an aromatic or non-aromatic ring structure having from 5 to 7 carbon atoms, and  $R_3$  is an alkoxy group having from 1 to 3 carbon atoms; and

15

- reacting  $R_1-R_2-Si-(OR_3)_3$  with 3  $SO_2Cl_2$  in the presence of  $C_5H_5N-HCl$  to yield  $R_1-R_2-SiCl_3 + 3 SO_2 + 3EtCl$ .

20

59. A chemical compound of the formula  $R_1-R_2-Si-(X_1)_3$ , wherein  $X_1$  is a halogen, acyloxy, alkoxy or OH group,  $R_2$  is an organic polycyclic or bridged ring structure with  $Si$  bound to carbon position 1, and  $R_1$  is a substituent at position 3 or higher of  $R_2$  selected from an alkyl group having from 1 or more carbons atoms, an alkenyl, an alkynyl, an acrylate, an aryl, an alcohol, OH, H, D, Cl or F.

25

60. The compound of claim 59, wherein  $R_2$  is an interlocking ring structure with one of the rings having 6 carbons.

61. The compound of claim 60, wherein  $R_2$  is an interlocking ring structure with one of the rings having 4 carbons.

30

62. The compound of claim 61, wherein  $R_2$  is further substituted at positions 3 and 5.

63. The compound of claim 185, wherein  $R_2$  is substituted at positions 3 and 5 with  $CF_3$ .

64. The compound of claim 60, wherein R2 is an interlocking ring structure with 2 rings, a first ring having at least 4 carbons and a second ring having at least 6 carbons.

65. The compound of any of claims 59 to 64, wherein R1 has the same meaning as above  
5 in any of claims 30 to 39.

66. The compound of any of claims 59 to 65, wherein X1 is an alkoxy group, ethoxy group, acyloxy group, an OH group.

10 67. The compound of any of claims 59 to 66, wherein R1 is CH<sub>2</sub>, CH<sub>2</sub>CH<sub>3</sub>, (CH<sub>2</sub>)<sub>2</sub>CH<sub>3</sub>, (CH<sub>2</sub>)CF<sub>3</sub>, CH<sub>2</sub>CH<sub>2</sub>OH or CH<sub>2</sub>CF<sub>2</sub>OH.

68. A poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the  
15 Si-O backbone, wherein R2 is polycyclic or bridged ring structure and R1 is a substituent at position 4 of R2 selected from an alkyl chain having from 1 to 4 carbons, H, D, F or OH.

69. The compound of claim 68, wherein

X<sub>1</sub> is a halogen, acyloxy, alkoxy or OH group,

20 R<sub>2</sub> is an aromatic group having 5 or 6 carbon atoms or a non-aromatic ring structure having from 5 to 7 carbons, and

R<sub>1</sub> is a substituent at position 4 of R<sub>2</sub> selected from alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, alkynyl groups having from 2 to 5 carbon atoms, and aromatic groups having 5 or 6 carbon atoms, each of said groups being  
25 optionally substituted, and Cl and F.

70. The compound of claim 68 or 69, wherein R1 is a linear or branched carbon chain having from 1 to 4 carbons, which is optionally fluorinated or perfluorinated.

30 71. The compound of any of claims 68 to 70, wherein R<sub>1</sub> is selected from the group consisting of -CF<sub>3</sub>, -CF<sub>2</sub>CF<sub>3</sub>, -CF<sub>2</sub>CF<sub>2</sub>CF<sub>3</sub>, -CF<sub>2</sub>OH, -CF<sub>2</sub>CF<sub>2</sub>OH, -CF<sub>2</sub>(CF<sub>2</sub>)<sub>2</sub>OH, -CF<sub>2</sub>(CF<sub>2</sub>)<sub>2</sub>CF<sub>3</sub>,

$-\text{CF}_2(\text{CF}_2)_3\text{OH}$ , a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons, a vinyl group, an acrylic group, an alkenyl group having from 1 to 4 carbons, and  $-\text{Si}(\text{X}_2)_3$ , where  $\text{X}_2$  is a halogen.

5 72. The compound of any of claims 68 to 71, wherein  $\text{X}_1$  is chlorine or ethoxy,

73. The compound according to any of claims 70 to 72, wherein  $\text{X}_2$  is chlorine.

10 74. The compound of any of claims 68 to 73, wherein  $\text{R}_2$  is an aromatic group selected from the group of aromatic groups having 5 or 6 carbon atoms and further being substituted at positions 3 and 5.

75. The compound of claim 74, wherein  $\text{R}_2$  is substituted at positions 3 and 5 with a group  $-\text{CF}_3$ .

15

76. The compound of claim 68, wherein  $\text{R}_1$  is  $-\text{CH}_3$ ,  $-\text{CH}_2\text{CH}_3$ ,  $-\text{CH}_2\text{CH}_2\text{CH}_3$ ,  $-(\text{CH}_2)_3\text{CF}_3$ ,  $-\text{CH}_2\text{CH}_2\text{OH}$  or  $-\text{CH}_2\text{CF}_2\text{OH}$ , wherein  $\text{R}_1$  is a carbon chain of from 1 to 4 carbons.

20 77. The compound of claim 68, wherein  $\text{R}_1$  is a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons.

78. The compound of claim 68, wherein  $\text{R}_1$  is a vinyl group.

25 79. The compound of claim 68, wherein  $\text{R}_1$  is an acrylic group.

80. The compound of claim 68, wherein  $\text{R}_2$  is a non-aromatic ring structure having from 5 to 7 carbons.

30 81. The compound of claim 80, wherein the Si-O backbone further comprises  $\text{R}_3$  groups bound to from 5% to 25% of the silicon atoms in the Si-O backbone, wherein  $\text{R}_3$  is an alkyl chain having from 1 to 4 carbon atoms.

82. The compound of claim 81, wherein R3 is a non-fluorinated, partially fluorinated or perfluorinated hydrocarbon group, selected from CF3, CH3, CH2CH3 and CF2CF3.

83. The compound of claim 81, wherein R3 is a carbon chain having from 1 to 4 carbon atoms and an -OH group, such as CF2OH or CF2CF2OH.

84. The compound of any of claims 68 to 83, having a dielectric constant of 2.7 or less, preferably 2.5 or less, in particular 2.3 or less.

85. A poly(organo siloxane) compound comprising a repeating Si-O backbone, -R1-R2 bound to from 25% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is a polycyclic or bridged ring structure and R1 is a substituent at position 4 of R2 selected from H, D, F, OH, an alkyl group having from 1 to 4 carbon atoms, and an alkenyl group having from 2 to 5 carbon atoms, and further comprising R3 bound to from 5% to 50% of the silicon atoms, wherein R3 is an alkenyl group having from 2 to 5 carbon atoms, acrylic group, aryl group or epoxy group.

86. The compound of claims 85, wherein

X<sub>1</sub> is a halogen, acyloxy, alkoxy or OH group,

R<sub>2</sub> is an aromatic group having 5 or 6 carbon atoms or a non-aromatic ring structure having from 5 to 7 carbons, and

R<sub>1</sub> is a substituent at position 4 of R<sub>2</sub> selected from alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, alkynyl groups having from 2 to 5 carbon atoms, and aromatic groups having 5 or 6 carbon atoms, each of said groups being optionally substituted, and Cl and F.

87. The compound of claims 85 or 86, wherein R1 is a linear or branched carbon chain having from 1 to 4 carbons, which is optionally fluorinated or perfluorinated.

88. The compound of any of claims 85 to 87, wherein

R<sub>1</sub> is selected from the group consisting of -CF<sub>3</sub>, -CF<sub>2</sub>CF<sub>3</sub>, -CF<sub>2</sub>CF<sub>2</sub>CF<sub>3</sub>, -CF<sub>2</sub>OH, -CF<sub>2</sub>CF<sub>2</sub>OH, -CF<sub>2</sub>(CF<sub>2</sub>)<sub>2</sub>OH, -CF<sub>2</sub>(CF<sub>2</sub>)<sub>2</sub>CF<sub>3</sub>, -CF<sub>2</sub>(CF<sub>2</sub>)<sub>3</sub>OH, a carbon chain having a carbon-carbon double bond and from 2 to 5 carbons, a vinyl group, an acrylic group, an alkenyl group having from 1 to 4 carbons, and -Si-(X<sub>2</sub>)<sub>3</sub>, where X<sub>2</sub> is a halogen.

89. The compound of any of claims 85 to 88, wherein  $X_1$  is chlorine or ethoxy,
90. The compound according to claims 88 or 89, wherein  $X_2$  is chlorine.
- 5 91. The compound of any of claims 85 to 90, wherein  $R_2$  is an aromatic group selected from the group of aromatic groups having 5 or 6 carbon atoms and further being substituted at positions 3 and 5.
- 10 92. The compound of claim 91, wherein  $R_2$  is substituted at positions 3 and 5 with a group  $-CF_3$ .
93. The compound of claim 85, wherein  $R_1$  is  $-CH_3$ ,  $-CH_2CH_3$ ,  $-CH_2CH_2CH_3$ ,  $-(CH_2)CF_3$ ,  $-CH_2CH_2OH$  or  $-CH_2CF_2OH$ .
- 15 94. The compound of claim 85, wherein  $R_1$  is  $CH_2$ ,  $CH_2CH_3$ ,  $(CH_2)_2CH_3$ ,  $(CH_2)CF_3$ ,  $CH_2CH_2OH$  or  $CH_2CF_2OH$ .
- 20 95. The compound of claim 85, wherein  $R_3$  is an epoxy group, such as glysidoxypropyl, or an acrylic group, such as a methacrylic group, an alkenyl group having from 2 to 5 carbon atoms, such as vinyl, or phenyl.
- 25 96. The compound of any of claims 85 to 95, further comprising  $R_4$  groups bound to from 5 to 50% of the silicon atoms of the Si-O backbone, wherein  $R_4$  is an alkyl group having from 1 to 4 carbon atoms.
97. The compound of claim 96, wherein  $R_4$  is  $CH_3$ ,  $CH_2CH_3$ ,  $(CH_2)_2CH_3$ ,  $CF_3$ ,  $CF_2CF_3$ ,  $(CF_2)_2CF_3$ .
- 30 98. The compound of any of claims 85 to 97, having a dielectric constant of 2.7 or less, preferably 2.5 or less, in particular 2.3 or less.
99. An integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a

poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is a polycyclic or bridged ring structure and R1 is a substituent at position 4 of R2 selected from H, D, F, OH, an alkyl group having from 1 to 4 carbon atoms, and an alkenyl group having from 2 to 5 carbon atoms.

100. The compound of claim 99, wherein R1 is a carbon chain of from 1 to 4 carbons, which is optionally fluorinated or perfluorinated.

101. The compound of claim 99 or 100, wherein R1 is a branched carbon chain.

102. The compound of claim 99, wherein R1 is CF<sub>3</sub>, CF<sub>2</sub>CF<sub>3</sub>, CF<sub>2</sub>CF<sub>2</sub>CF<sub>3</sub>, CF<sub>2</sub>OH, CF<sub>2</sub>CF<sub>2</sub>OH or (CF<sub>2</sub>)<sub>3</sub>OH, (CF<sub>2</sub>)<sub>3</sub>CF<sub>3</sub>, (CF<sub>2</sub>)<sub>4</sub>OH.

103. A computer comprising an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is a polycyclic or bridged ring structure and R1 is a substituent at position 4 of R2.

104. A method for making an integrated circuit, comprising providing alternating areas of electrically insulating and electrically conducting materials within a layer on a semiconductor substrate, wherein the electrically insulating material comprises a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is a polycyclic or bridged ring structure and R1 is a substituent at position 4 of R2 selected from an alkyl chain having from 1 to 4 carbons, H, D, F or OH.

105. The method of claim 104, wherein the electrically insulating material is deposited, baked and patterned, with the electrically conductive material being deposited in removed areas of the patterned dielectric.

106. The method of claim 106, wherein the electrically conductive material comprises copper.
107. The method of claim 318, which is a dual damascene process.
- 5 108. A chemical compound of the formula  $R_1-R_2-Si-(X_1)_3$ , wherein  $X_1$  is a halogen, acyloxy, alkoxy or OH group,  $R_2$  is an aromatic group having 8 carbon atoms and  $R_1$  is a substituent at position 5 of  $R_2$  selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F.
- 10 109. The compound of claim 108, wherein  $R_1$ ,  $R_2$  and  $X_1$  have the same meaning as above in any of claims 11 to 22.
- 15 110. The compound of claim 108 or 109, wherein  $R_2$  is further substituted at positions 4 and 6.
111. The compound of claim 110, wherein  $R_2$  is substituted at positions 4 and 6 with  $CF_3$ .
- 20 112. The compound of any of claims 108 to 111, wherein  $R_2$  is a non-aromatic ring structure having from 5 to 7 carbons.
113. A poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and  $-R_1-R_2$  bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein  $R_2$  is an aromatic group having 8 carbon atoms and  $R_1$  is a substituent at position 5 of  $R_2$ .
- 25 114. The compound of claim 113, wherein  $R_1$ ,  $R_2$  and  $X_1$  have the same meaning as above in any of claims 11 to 22.
- 30 115. The compound of claim 113, wherein  $R_2$  is further substituted at positions 4 and 6.
116. The compound of claim 115, wherein  $R_2$  is substituted at positions 4 and 6 with  $CF_3$ .

117. The compound of any of claims 113 to 116, wherein R2 is a non-aromatic ring structure having from 5 to 7 carbons.
118. The compound of any of claims 113 to 116, wherein the Si-O backbone further  
5 comprises R3 groups bound to from 5% to 25% of the silicon atoms in the Si-O backbone, wherein R3 is an alkyl chain having from 1 to 4 carbon atoms, an alkenyl chain or aryl group.
119. The compound of claim 118, wherein R3 is a non-fluorinated, partially fluorinated or  
10 perfluorinated hydrocarbon group, selected from CF3, CH3, CH2CH3 and CF2CF3.
120. The compound of claim 119, wherein R3 is a carbon chain having from 1 to 4 carbon atoms and an -OH group, such as CF2OH or CF2CF2OH.
121. The compound of any of claims 113 to 120, having a dielectric constant of 2.7 or less,  
15 preferably 2.5 or less, in particular 2.3 or less.
122. A poly(organo siloxane) compound comprising a repeating Si-O backbone, -R1-R2 bound to from 25% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an  
20 aromatic group having 8 carbon atoms and R1 is a substituent at position 5 of R2 (again this could be drawn out for clarity), and R3 bound to from 5% to 50% of the silicon atoms, wherein R3 is an alkenyl group having from 2 to 5 carbon atoms, acrylic group or epoxy group.
123. The compound of claim 122, wherein the substituents R1, R2, R3, X1 and X2 have  
25 the same meaning as above in any of claims 30 to 39.
124. The compound of claim 122 or 123, further comprising R4 groups bound to from 5 to  
30 50% of the silicon atoms of the Si-O backbone, wherein R4 is an alkyl group having from 1 to 4 carbon atoms.
125. The compound of claim 124, wherein R4 is CH3, CH2CH3, (CH2)2CH3, CF3, CF2CF3, (CF2)2CF3.

126. The compound of any of claims 122 to 125, having a dielectric constant of 2.7 or less, preferably 2.5 or less, in particular 2.3 or less.

127. An integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 8 carbon atoms and R1 is a substituent at position 5 of R2.

10

128. The circuit of claim 447, wherein R1, R2 and X2 have the same meaning as in any of claims 30 to 39.

129. A computer comprising an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 8 carbon atoms and R1 is a substituent at position 5 of R2.

20

130. A method for making an integrated circuit, comprising providing alternating areas of electrically insulating and electrically conducting materials within a layer on a semiconductor substrate, wherein the electrically insulating material comprises a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 8 carbon atoms and R1 is a substituent at position 5 of R2 selected from an alkyl chain having from 1 to 4 carbons, an alkenyl group having from 2 to 6 carbons or OH.

131. The method of claim 130, wherein the electrically insulating material is deposited, baked and patterned, with the electrically conductive material being deposited in removed areas of the patterned dielectric.

30

132. The method of claim 131, wherein the electrically conductive material comprises copper.

133. The method of claim 132, which is a dual damascene process.

5

134. A chemical compound of the formula  $R_1-R_2-Si-(X_1)_3$ , wherein  $X_1$  is a halogen, acyloxy, alkoxy or OH group,  $R_2$  is an aromatic group having 10 carbon atoms and  $R_1$  is a substituent at position 6 of  $R_2$  selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F.

10

135. The compound of claim 134, wherein  $R_1$ ,  $R_2$ ,  $X_1$  and  $X_2$  have the same meaning as in any of claims 30 to 39.

136. The compound of claim 134 or 135, wherein  $R_2$  is a phenyl group, optionally substituted at positions 5 and 7.

15

137. The compound of claim 136, wherein  $R_2$  is substituted at positions 5 and 7 with  $CF_3$ .

138. The compound of claim 134 or 135, wherein  $R_2$  is a non-aromatic ring structure having from 5 to 7 carbons.

20

139. A poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and  $-R_1-R_2$  bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein  $R_2$  is an aromatic group having 10 carbon atoms and  $R_1$  is a substituent at position 6 of  $R_2$ .

25

140. The compound of claim 139, wherein  $R_1$ ,  $R_2$  and  $X_2$  have the same meaning as in any of claims 30 to 39 above.

30

141. The compound of claim 140, wherein  $R_2$  is a phenyl group, optionally substituted at positions 5 and 7.

142. The compound of claim 141, wherein  $R_2$  is substituted at positions 5 and 7 with  $CF_3$ .

143. The compound of claim 139, wherein R2 is a non-aromatic ring structure having from 5 to 7 carbons.

5 144. The compound of claim 139, wherein the Si-O backbone further comprises R3 groups bound to from 5% to 25% of the silicon atoms in the Si-O backbone, wherein R3 is an alkyl chain having from 1 to 4 carbon atoms, an alkenyl chain or aryl group

10 145. The compound of claim 144, wherein R3 is a non-fluorinated, partially fluorinated or perfluorinated hydrocarbon group, having a carbon chain of 1 to 4 carbon atoms and optionally containing an -OH group.

146. The compound of claim 146, wherein R3 is CF<sub>3</sub>, CH<sub>3</sub>, CH<sub>2</sub>CH<sub>3</sub>, CF<sub>2</sub>CF<sub>3</sub>, CF<sub>2</sub>OH or CF<sub>2</sub>CF<sub>2</sub>OH.

15

147. The compound of any of claims 139 to 146, having a dielectric constant of 2.7 or less, preferably 2.5 or less, in particular 2.3 or less.

148. A poly(organo siloxane) compound comprising a repeating Si-O backbone, -R1-R2  
20 bound to from 25% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2, and R3 bound to from 5% to 50% of the silicon atoms, wherein R3 is an alkenyl group having from 2 to 5 carbon atoms, acrylic group or epoxy group.

25 149. The compound of claims 148, wherein R1, R2, R3, X2 have the same meaning as above in any of claims 30 to 39.

150. The compound of claim 149, further comprising R4 groups bound to from 5 to 50%  
30 of the silicon atoms of the Si-O backbone, wherein R4 is an alkyl group having from 1 to 4 carbon atoms.

151. The compound of claim 150, wherein R4 is CH<sub>3</sub>, CH<sub>2</sub>CH<sub>3</sub>, (CH<sub>2</sub>)<sub>2</sub>CH<sub>3</sub>, CF<sub>3</sub>, CF<sub>2</sub>CF<sub>3</sub>, (CF<sub>2</sub>)<sub>2</sub>CF<sub>3</sub>.

152. The compound of any of claims 148 to 151, having a dielectric constant of 2.7 or less, preferably 2.5 or less, in particular 2.3 or less.

153. An integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2.

154. The compound of claim 153, wherein R1, R2 and X2 have the same meaning as above in any of claims 30 to 39.

155. A computer comprising an integrated circuit having a layer with areas of an electrically conductive first material and an electrically insulating second material, wherein the second material is a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2.

156. A method for making an integrated circuit, comprising providing alternating areas of electrically insulating and electrically conducting materials within a layer on a semiconductor substrate, wherein the electrically insulating material comprises a poly(organo siloxane) compound comprising a repeating Si-O backbone, carbon chain crosslinking groups and -R1-R2 bound to from 5% to 50% of the silicon atoms in the Si-O backbone, wherein R2 is an aromatic group having 10 carbon atoms and R1 is a substituent at position 6 of R2 selected from an alkyl chain having from 1 to 4 carbons, an alkenyl group having from 2 to 6 carbons or OH.

157. The method of claim 156, wherein the electrically insulating material is deposited, baked and patterned, with the electrically conductive material being deposited in removed areas of the patterned dielectric.

158. The method of claim 157, wherein the electrically conductive material comprises copper.

159. The method of claim 158, which is a dual damascene process.

5

160. A method for making a chemical compound of the formula  $R1-R2-Si-(X1)_3$ , wherein  $X1$  is a halogen or alkoxy group,  $R2$  is an aromatic group having 10 carbon atoms and  $R1$  is a substituent at position 6 of  $R2$ ,  $R1$  being selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, or OH, comprising:

10            reacting  $R1-R2-Br$  with Mg and  $Si-(OR3)_4$  to form  $R1-R2-Si-(OR3)_3 + BrMgOR$ , where  $R1$  is selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl having from 2 to 5 carbon atoms,  $R2$  is an aromatic or non-aromatic ring structure having from 5 to 7 carbon atoms, and  $R3$  is an alkoxy group having from 1 to 3 carbon atoms;

15            reacting  $R1-R2-Si-(OR3)_3$  with 3  $SO_2Cl_2$  in the presence of  $C_5H_5N-HCl$  to yield  $R1-R2-SiCl_3 + 3 SO_2 + 3EtCl$ .

161. The compound of claim 1, wherein  $R2$  is further substituted at positions 3 and 4.

20    162. The compound of claim 161, wherein  $R2$  is substituted at positions 3 and 4 with  $CF_3$ .

163. The compound of claim 161 or 162, wherein  $R2$  is substituted at position 3 with  $CF_3$  and at position 4 with  $CH_3$ .

25    164. A thin film comprising a composition obtained by hydrolyzing

- a monomeric silicon compound having at least one hydrocarbyl radical, containing an unsaturated carbon-to-carbon bond, and at least one hydrolyzable group attached to the silicon atom of the compound with
- another monomeric silicon compound having at least one aryl group and at least

30            one hydrolyzable group attached to the silicon atom of the compound to form a siloxane material.

165. The thin film according to claim 164, wherein the composition comprises a cross-linked poly(organosiloxane).

166. The thin film according to claim 164, wherein the composition comprises a poly(organosiloxane) obtained by

- 5 hydrolyzing a first silicon compound having the general formula I



I

10 wherein

Y1 represents a hydrolyzable group;

R1 is an aromatic group having 6 carbon atoms and R1 is a substituent at position 4 of R1 selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5 carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F;

15

R2 and R3 are independently selected from hydrogen, substituted or non-substituted alkyl groups, substituted or non-substituted alkenyl and alkynyl groups, and substituted or non-substituted aryl groups; a is an integer 0, 1 or 2;

20

b is an integer a+1;  
c is an integer 0, 1 or 2;  
d is an integer 0 or 1; and  
b + c + d = 3

25

with a second silicon compound having the general formula II



II

wherein

Y2 represents a hydrolyzable group;

30

R4 is an aromatic group having 6 carbon atoms and R4 is a substituent at position 4 of R4 selected from an alkyl group having from 1 to 4 carbon atoms, an alkenyl group having from 2 to 5

carbon atoms, an alkynyl group having from 2 to 5 carbon atoms, Cl or F;

R5 and R6 are independently selected from hydrogen, substituted or non-substituted alkyl groups, substituted or non-substituted alkenyl and alkynyl groups, and substituted or non-substituted aryl groups;

e is an integer 0, 1 or 2;

f is an integer e+1;


g is an integer 0, 1 or 2;

h is an integer 0 or 1; and

$f + g + h = 3$ .

10/552737


1/6

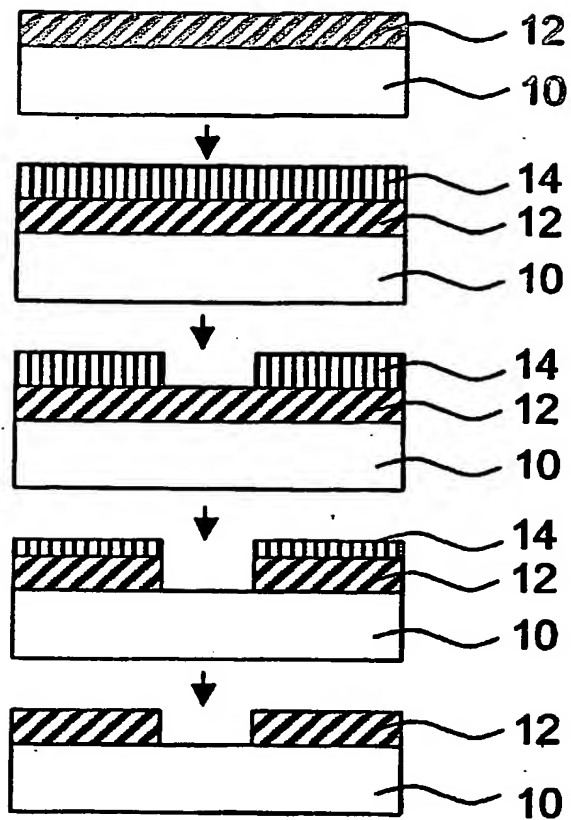

**Figure 1**

**10/552737**

2/6

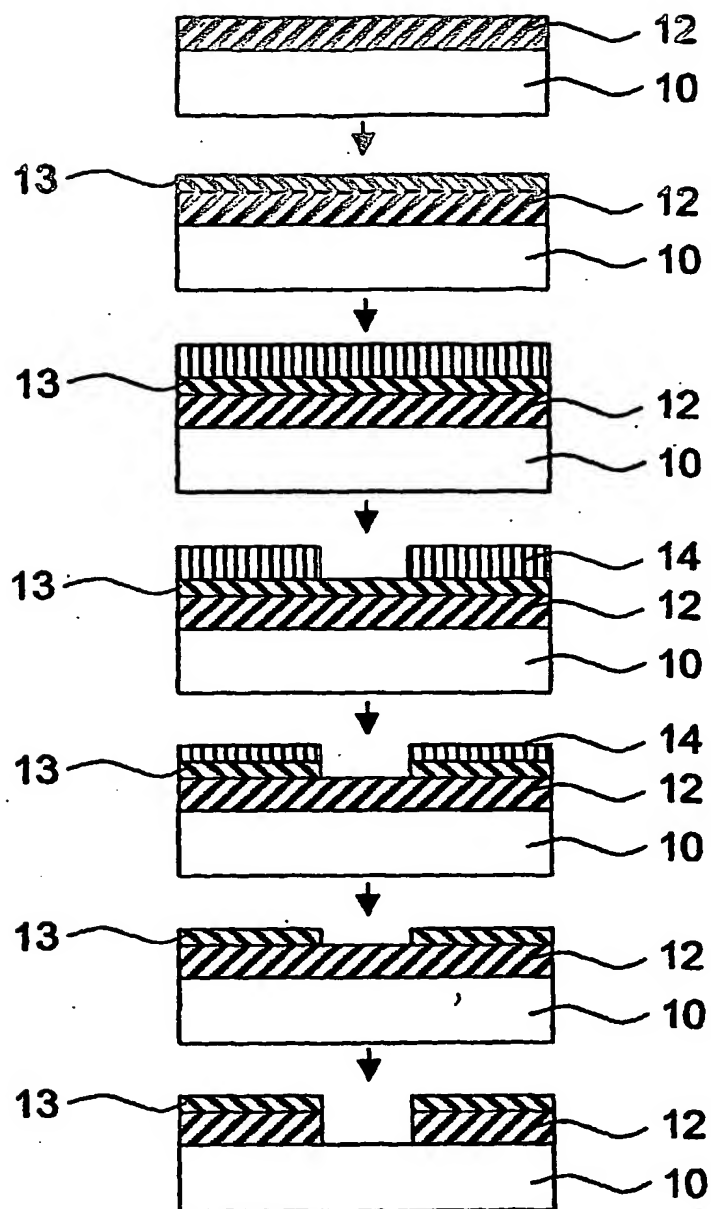**Figure 2**

3/6

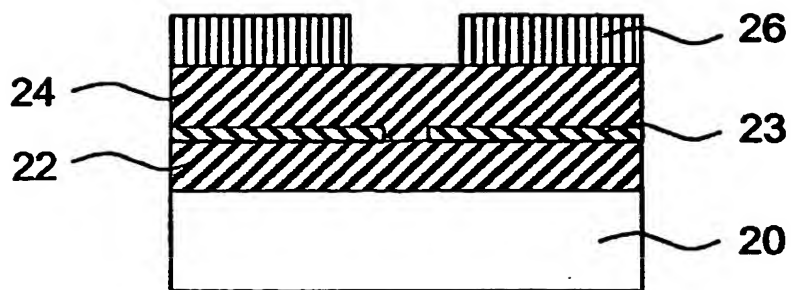


Figure 3a


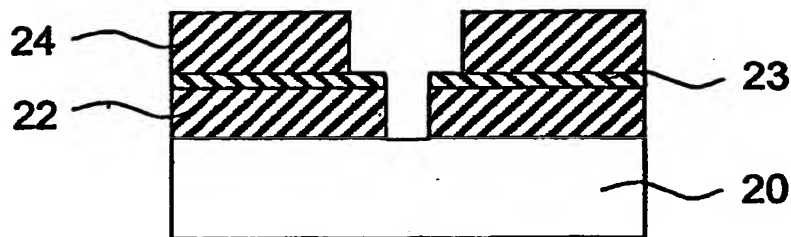



Figure 3b

4/6

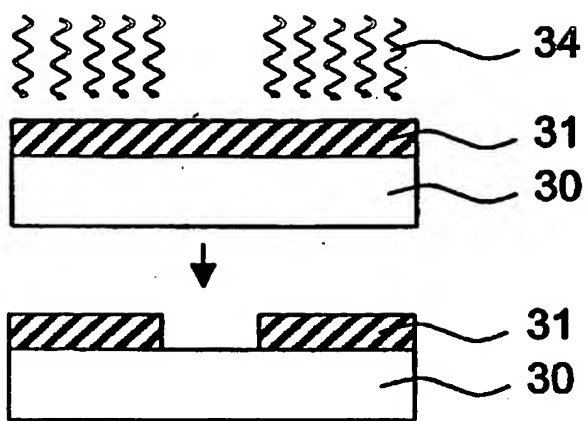

**Figure 4**

5/6

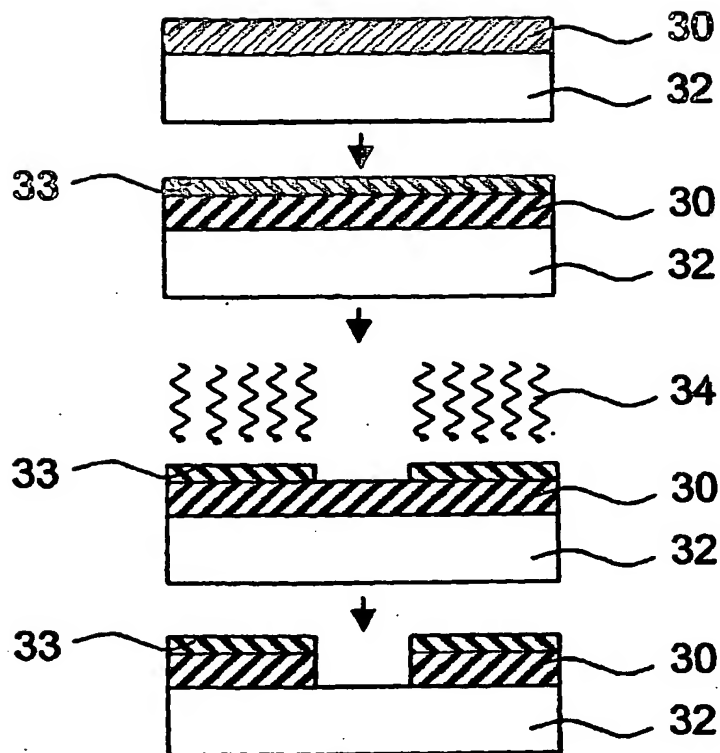**Figure 5**

6/6

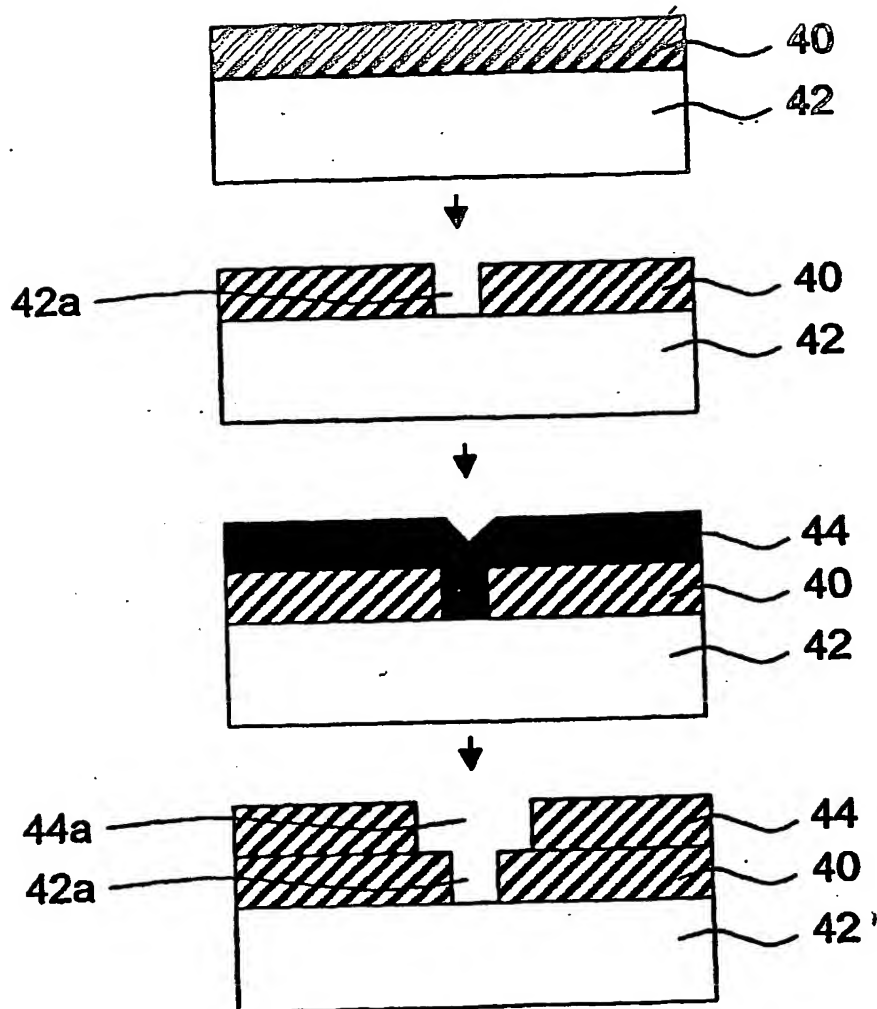


Figure 6

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number  
**WO 2004/090936 A3**

(51) International Patent Classification<sup>7</sup>: **C08G 77/20.**  
77/04. H01B 3/46

(21) International Application Number:  
PCT/FI2004/000224

(22) International Filing Date: 13 April 2004 (13.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/461.820 11 April 2003 (11.04.2003) US

(71) Applicants (for all designated States except US):  
SILECS OY [FI/FI]; Tietotie 3, FI-02150 Espoo (FI).  
PAULASAARI, Jyri [FI/FI]; Reelinkikatu 14 B 10,  
FI-20810 Turku (FI). PIETIKÄINEN, Jarkko [FI/FI];  
Mannerheimintie 35 B 34, FI-00250 Helsinki (FI). TÖR-  
MÄNEN, Teemu [FI/FI]; Eestintaival 3 A 1, FI-02280  
Espoo (FI). HACKER, Nigel [GB/FI]; Suotorpantie 15  
J 31, FI-02130 Espoo (FI). VISWANATHAN, Nun-  
gavaram [IN/US]; 6427 Trinidad Drive, San Jose, CA  
95120 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): RANTALA, Juha  
[FI/FI]; Tietotie 3, FI-02150 Espoo (FI).

(74) Agent: SEPPO LAINE OY; Itämerenkatu 3 B, FI-00180  
Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

(88) Date of publication of the international search report:  
9 December 2004

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: LOW-K DIELECTRIC MATERIAL

(57) Abstract: The present invention relates to thin films suitable as dielectrics in integrated circuits and for other similar applications and to methods for the production thereof. In particular, the invention concerns thin films comprising at least partially cross-linked siloxane structures obtainable by hydrolysis of one or more silicon compounds of the general formula  $R_1-R_2-Si-(X_1)_3$ , wherein  $X_1$  is a leaving group,  $R_2$  is a cycloalkyl having from 3 to 16 carbon atoms, an aryl having from 5 to 18 carbon atoms or a polyaromatic alkyl group having from 7 to 16 carbon atoms, and  $R_1$  is a substituent of  $R_2$  selected from alkyl groups having from 1 to 4 carbon atoms, alkenyl groups having from 2 to 5 carbon atoms, alkynyl groups having from 2 to 5 carbon atoms, and aromatic groups having 5 or 6 carbon atoms, each of said groups being optionally substituted, and Cl and F.

WO 2004/090936 A3

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2004/000224

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: C08G 77/20, C08G 77/04, H01B 3/46

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: C08G, H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, CAPLUS

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	STN International, File CAPLUS, CAPLUS accession no. 1975:497451, Document no. 83:97451, Vaks, E.A. et al: "Radiation-chemical synthesis of polyfluoroaromatic derivatives of silicon affected by accelerated electrons", & Zhurnal Obshchei Khimii (1975), 45(6), 1315-22	1
	--	
X	STN International, file CAPLUS, CAPLUS accession no. 1979:420591, Document no. 91:20591, Novikov, S.S. et al: "Silicon-containing polycyclic hydrocarbons. I. Study of the alkylation of phenylchlorosilanes by 1-bromoadamantane", & Zhurnal Obshchei Khimii (1979), 49(4), 772-5	1
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

5 October 2004

Date of mailing of the international search report

14-10-2004

Name and mailing address of the ISA/

Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Erika Stenroos/BS  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2004/000224

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Journal of the American Chemical Society, volume 91, no 6, 1969, March 12, R.A. Benkeser et al: "A New Method of Forming the Carbon-Silicon Bond. Reductive Silylation of Carbonyl Compounds", pages 1556-1557, see run --	1
X	Acta Chemica Scandinavica, volume 50, 1996, Tamio Hayashi: "Asymmetric Hydrosilylation of Olefins Catalyzed by MOP-Palladium Complexes", pages 259-266, see page 263, no. 14a --	59-60, 64
X	US 6348240 B1 (JEFFREY M. CALVERT ET AL), 19 February 2002 (19.02.2002), See ex. 5 and 6 --	59, 60, 64
A	US 6121340 A (SHICK ET AL), 19 Sept 2000 (19.09.2000) --	1,10,29,41,52,53,59, 68,85,99,103,104, 108,113,122,127, 129,130,134,139, 148,153,155,156
E	US 20040170760 A1 (MEAGLEY ET AL), 2 Sept 2004 (02.09.2004), --	1,10,29,41,52,53,59, 68,85,99,103,104, 108,113,122,127, 129,130,134,139, 148,153,155,156
A	US 20020037442 A1 (GRILL ET AL), 28 March 2002 (28.03.2002), --	1,10,29,41,52,53,59, 68,85,99,103,104, 108,113,122,127, 129,130,134,139, 148,153,155,156
A	US 6242339 B1 (AOI), 5 July 2001 (05.07.2001), --	1,10,29,41,52,53,59, 68,85,99,103,104, 108,113,122,127, 129,130,134,139, 148,153,155,156

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2004/000224

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 03059990 A1 (SILECS OY), 24 July 2003 (24.07.2003),  ---	1,10,29,41,52,53,59, 68,85,99,103,104, 108,113,122,127, 129,130,134,139, 148,153,155,156
A	WO 03015129 A2 (ADVANCED TECHNOLOGY MATERIAL, INC.), 20 February 2003 (20.02.2003),  -----	1,10,29,41,52,53,59, 68,85,99,103,104, 108,113,122,127, 129,130,134,139, 148,153,155,156

# INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/FI2004/000224**

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☒ Claims Nos.: **1**  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:  
**see extra sheet**
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

**see extra sheet**

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: **1-163**  
**see extra sheet**

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.

## Box II.2

Present claim 1 relates to an extremely large number of possible compounds. In fact, the claim contains so many options, variables and possible permutations that a lack of clarity within the meaning of Article 6 PCT arises to such an extent as to render a meaningful search of the claims impossible.

Consequently, the search has been carried out for those compounds included in the application which appear to be clear, namely the compounds according to claims 59, 108 and 134.

## Box III

The International Search Authority considers that there are 3 inventions covered by the claims indicated as follows:

I: Claims: 1, 57, 59, 108, 134 and 160 are directed to a chemical compound and a method for making the chemical compound.

II: Claims 1, 10, 29, 41, 52, 53, 59, 68, 85, 99, 103, 104, 108, 113, 122, 127, 129, 130, 134, 139, 148, 153, 155 and 156 are directed to a poly(organo siloxane), an integrated circuit having a layer of poly(organo siloxane) and a computer comprising an integrated circuit with a poly(organo siloxane) layer.

III: Claim 164 is directed to a thin film comprising a composition obtained by hydrolyzing two different monomeric silicon compounds to form a siloxane material.

The ISA has carried out a partial search which relates to invention I mentioned above.

The applicant is invited to pay an additional fee for the inventions II and III as listed above.

Statement:

The present application has been considered to contain 3 inventions which are not linked in a permissible manner as required by PCT Rule 13.1 or 13.2:

See PCT Guidelines § 10.15;

"While a single set of independent claims according to one of the subparagraphs of paragraph 10.12 is always permissible, it does not require the International Authority to accept a plurality of such sets."

.../...

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/FI2004/000224

Independent claims are permissible for two related articles, in this case a monomer and a polymer, however, it does not follow that, under paragraph 10.12, an applicant may include also, in the one international application, four additional independent claims: two claims for a process for the manufacture of the monomer and four claims for the use of a polymer in the computer industry.

Consequently, the (two) groups of inventions are not so linked as to fulfill the requirements for unity of invention as required by Rule 13.1, 13.2 and 13.3 PCT.

In the present application the invention number III is not linked to either invention I or II.

## INTERNATIONAL SEARCH REPORT

Information on patent family members

03/09/2004

International application No.

PCT/FI 2004/000224

US 6348240 B1 19/02/2002

US	5648201 A	15/07/1997
DE	69231893 D,T	28/03/2002
EP	0510711 A,B	28/10/1992
JP	5202483 A	10/08/1993
US	5389496 A	14/02/1995
US	5500315 A	19/03/1996

US 6121340 A 19/09/2000

AT	215105 T	15/04/2002
AU	5196998 A	29/05/1998
CA	2271382 A	14/05/1998
DE	69711378 D,T	24/10/2002
DK	906588 T	08/07/2002
EP	0906588 A,B	07/04/1999
SE	0906588 T3	
ES	2178017 T	16/12/2002
TW	493106 B	00/00/0000
WO	9820394 A	14/05/1998

US 20040170760 A1 02/09/2004

NONE

US 20020037442 A1 28/03/2002

US	6479110 B	12/11/2002
TW	492108 B	00/00/0000
US	6312793 B	06/11/2001
US	6437443 B	20/08/2002
US	20020034625 A	21/03/2002

US 6242339 B1 05/07/2001

JP	3305251 B	22/07/2002
JP	11243147 A	07/09/1999
US	6333257 B	25/12/2001
US	6710451 B	23/03/2004
US	20010026019 A	04/10/2001

WO 03059990 A1 24/07/2003

US	20030186494 A	02/10/2003
US	20040002617 A	01/01/2004
US	20040012089 A	22/01/2004
WO	03057702 A	17/07/2003
WO	03057703 A	17/07/2003
WO	03063205 A	31/07/2003

WO 03015129 A2 20/02/2003

US 20030064154 A 03/04/2003